

VILPE[®]
Innovative and Easy



**CATALOGUE
2022**



It all began with an innovation

The story of our company began on a roofing work site where my father, Eero Saikkonen, worked in summer 1973. The roofing felt and insulation were glued together with bitumen, and the roofers had trouble keeping them in place. Eero solved the problem by developing a new type of fastener on April Fools' Day 1974, and this fastener was followed by more innovations during the next decades. The latest innovation from our company is the VILPE Sense smart roof, which monitors the humidity levels of structures and removes moisture.

The construction sector has grown a great deal during the pandemic, and this has also been reflected in VILPE's activities. We have increased our production to meet the demand, and our second pandemic-era factory expansion in Korsholm will be completed this year. At the same time, however, the availability of raw materials and components has

become difficult to predict. This poses a challenge to the entire HVAC sector. We do our best to secure the availability of our products, but the situation is exceptional and it is likely that the availability of certain roof fan models will decrease. Our sales team will help customers with any questions.

In addition to our innovations, long-term cooperation with our customers is one of the corner stones of our success. Despite the global turmoil, this is an area in which we do not want to compromise. Together we bring better indoor air, energy efficiency and longevity of structure to all spaces.

Tuomas Saikkonen
CEO
VILPE



Why VILPE®?

- ✓ **The most extensive range of products and optimal storability**
- ✓ **Alternatives for all types of roofing**
- ✓ **Complete sets:** installation tools and instructions included, guarantees for VILPE® assemblies
- ✓ **Installation:** quick and easy
- ✓ **Functionality:** totally waterproof end result
- ✓ **Aesthetics:** harmonious design and colours that go well with roofing materials
- ✓ **Durability:** 40 years of manufacturing experience
- ✓ **Exceptionally long warranty**




+358 20 123 3222

sales@vilpe.com

> **VILPE.COM**

Sales and Technical support	Tel.	+358 20 123 3222
	E-mail	sales@vilpe.com
Tuomas Saikkonen, CEO		+358 20 123 3284
Carina Lagerström, Customer Service Manager		+358 20 123 3220
Tiina Häggblom, Customer Service Manager		+358 20 123 3219
Leif Fredriksson, Sales Manager, Sweden		+46 73 386 9420
Nisse Hedberg, Salesman, Sweden		+46 70 511 2020
Jonas Ryden, Salesman, Sweden		+46 70 770 1891
Ville Hellström, Export Manager, Western Europe		+358 20 123 3288
Andrzej Janusz, CEO, Vilpe Poland sp. z.o.o. Poland & Eastern Europe		+48 69 534 9751
Ella Osipova, Export Manager Russia and CIS countries		+358 20 123 3213
Tatiana Sorokina, Operations manager Russia and CIS countries		+358 20 123 3249
Enna Moshnikova, Export Assistant Russia and CIS countries		+358 20 123 3242
Janis Abolins, Sales Manager Baltic states		+371 22 30 5950
Auksė Batvinskienė, Area Manager Lithuania		+370 65 57 3120
Viktors Ksenzovs, Area Manager Latvia		+371 24 60 3003

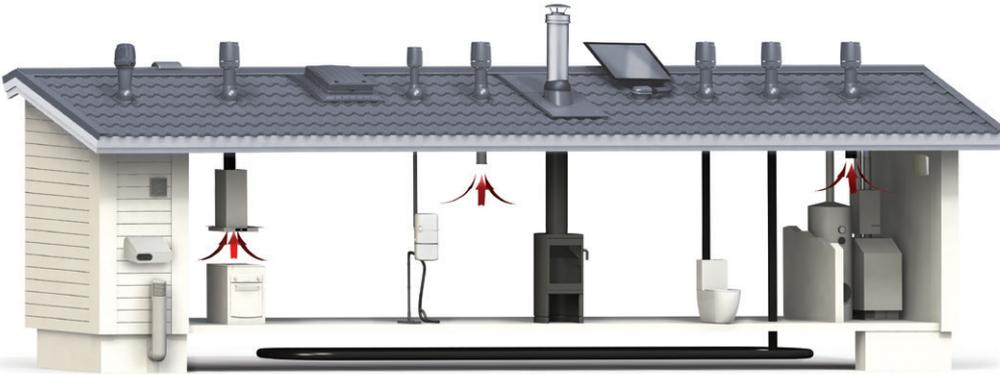

The VILPE product family includes a complete selection of roof elements and terminal equipment for ventilation. VILPE products form ensembles easy to assemble since all the installation tools and instructions are included in the sets. Uniquely long warranties only apply to ensembles with genuine VILPE products.

P-series for pitched roofs

The P-series roof fans and exhaust ventilation pipes can be led watertightly with a pass-through set through a roof. VILPE pass-through sets can be installed on any roofs with the most common pitches. The pass-through set is always selected according to the roofing material of the roof. All the roof fans and exhaust ventilation pipes in the P-series are compatible with all pass-through set types. Using P-series XL roof fans and XL exhaust ventilation pipes requires an XL pass-through.



S-series for flat surface installation

The S-series roof fans and exhaust vents are designed to be installed in the ventilation shaft, onto a silencer or in or other horizontal surface. Thus, they are also suitable for gently sloping roofs. The S-roof fans and S-exhaust vents are used, for example, in blocks of flats and terraced houses, when flat-specific ventilation is required. The S-series roof fan can also be used for modifying an old natural ventilation system into a mechanical one during renovation.



Products for low-pitched roofs

The VILPE product family includes a wide selection of fasteners, sealings and underpressure vents for needs of various roofings. The Felt pass-throughs (tall) enable installing all the roof fans and exhaust ventilation pipes with diameter of 100–250 mm on low-pitched roofs. The backwater heights of pass-throughs are all according to regulations.



ECo FLOW Roof fans, P-series	6
E Traditional Design Roof fans, P-series	7
ECo FLOW Roof fans, S-series	8
E Traditional Design Roof fans, S-series	9
Quick selection for the VILPE® roof fans	10
Wiring diagrams for roof fans	10
VILPE Sense	11
ECo Ideal Wireless	12
Controllers, Service sets	13
Ventilation pipes	14
FLOW Exhaust vents, P-series	16
FLOW Exhaust vents, S-series	17
Wive intake vent	20
Intake vents	23
Multifunction grilles	24
IO wall element	26
P-series pass-throughs	28
Aerial sleeves and pipe pass-throughs	32
Ventilation of structures	33
Roof hatches	33
KTV ventilation sets	34
Alipai underpressure vents	35
Solar pass-throughs	36
Ross ventilation poles	37
Chimney pass-throughs	38
End caps	40
Felt roof pass-through seals	40
Metal roof pass-through seals	41
Vapour barrier seals	41
PVC roof pass-through seals	41
Roof drains	42
Fasteners	46
General terms of Sale	51

VILPE® standard colours

	Reference colour
	Black RAL 9017
	Brown RAL 8017
	Green RAL 6020
	Grey RAL 7015
	Red RAL 3009
	Brick red RAL 8004
	Light grey RAL 7040

Product listings

- Psc/pack** How many items a pack contains. The number ordered must be divisible with this number.
- Psc/pallet** How many items a pallet contains. Our pallets are EUR pallets (80 x 120 cm) with height of 120 cm unless stated otherwise.
- Delivery** Stock/Order. Order means the product is manufactured only when ordered, which lengthens the delivery time slightly.



VILPE® ECO 110P/500 FLOW ROOF FAN

Description: Energy-efficient roof fan with FLOW cowl and EC motor for radon ventilation. Also suitable for ventilating an ecological toilet. A separate control panel--either the VILPE ECo Ideal Wireless or the VILPE ECo Controller 0-10 V--is needed to adjust the roof fan. VILPE pass-throughs suitable for a range of roofing types and material are available separately.
Dimensions: Duct size Ø 110 mm, external Ø 225 mm, height above roof approx. 500 mm.
Contents: Roof fan, screws, installation, operating and maintenance instructions.

Black	1	28*	Stock	350272
Grey	1	28*	Order	350277
Red	1	28*	Order	350278
Brick Red	1	28*	Order	350279
Light Grey	1	12	Order	350271



VILPE® ECO 125P/500 FLOW ROOF FAN

Description: Energy-efficient insulated roof fan with FLOW cowl and EC motor (with 0-10V control voltage). Includes a galvanized steel inner pipe with a lip seal. The pipe has a 50-mm built-in silencer. VILPE ECo control panels and VILPE pass-throughs suitable for a range of roofing types and material are available separately.
Dimensions: Duct size Ø 125 mm, external Ø 225 mm, height above roof approx. 500 mm.
Contents: Roof fan, screws, installation, operating and maintenance instructions.

Black	1	24*	Stock	350242
Green	1	24*	Order	350246
Grey	1	24*	Stock	350247
Red	1	24*	Order	350248
Brick Red	1	24*	Stock	350249
Light Grey	1	24*	Order	350241
Anthracite	1	24*	Order	35024G



VILPE® ECO 160P/500 FLOW ROOF FAN

Description: Energy-efficient insulated roof fan with FLOW cowl and EC motor (with 0-10V control voltage). Includes a galvanized steel inner pipe with a lip seal. VILPE ECo control panels and VILPE pass-throughs suitable for a range of roofing types and material are available separately.
Dimensions: Duct size Ø 160 mm, external Ø 225 mm, height above roof approx. 500 mm.
Contents: Roof fan, screws, installation, operating and maintenance instructions.



Black	1	24*	Stock	350252
Grey	1	24*	Stock	350257
Red	1	24*	Order	350258
Brick Red	1	24*	Stock	350259
Light Grey	1	24*	Order	350251
Anthracite	1	24*	Stock	35025G



VILPE® ECO 200P/500 FLOW ROOF FAN

Description: Energy-efficient insulated roof fan with FLOW cowl and EC motor (with 0-10V control voltage). Includes a galvanized steel inner pipe with a lip seal. VILPE ECo control panels and VILPE pass-throughs suitable for a range of roofing types and material are available separately.
Dimensions: Duct size Ø 200 mm, external Ø 300 mm, height above roof approx. 500 mm.
Contents: Roof fan, screws, installation, operating and maintenance instructions.

Black	1	6	Stock	350302
Grey	1	6	Order	350307
Red	1	6	Order	350308
Brick Red	1	6	Order	350309

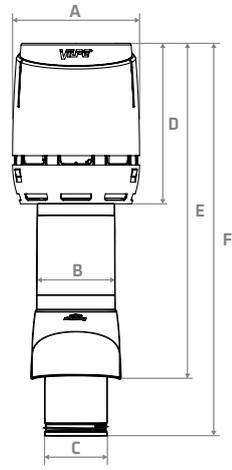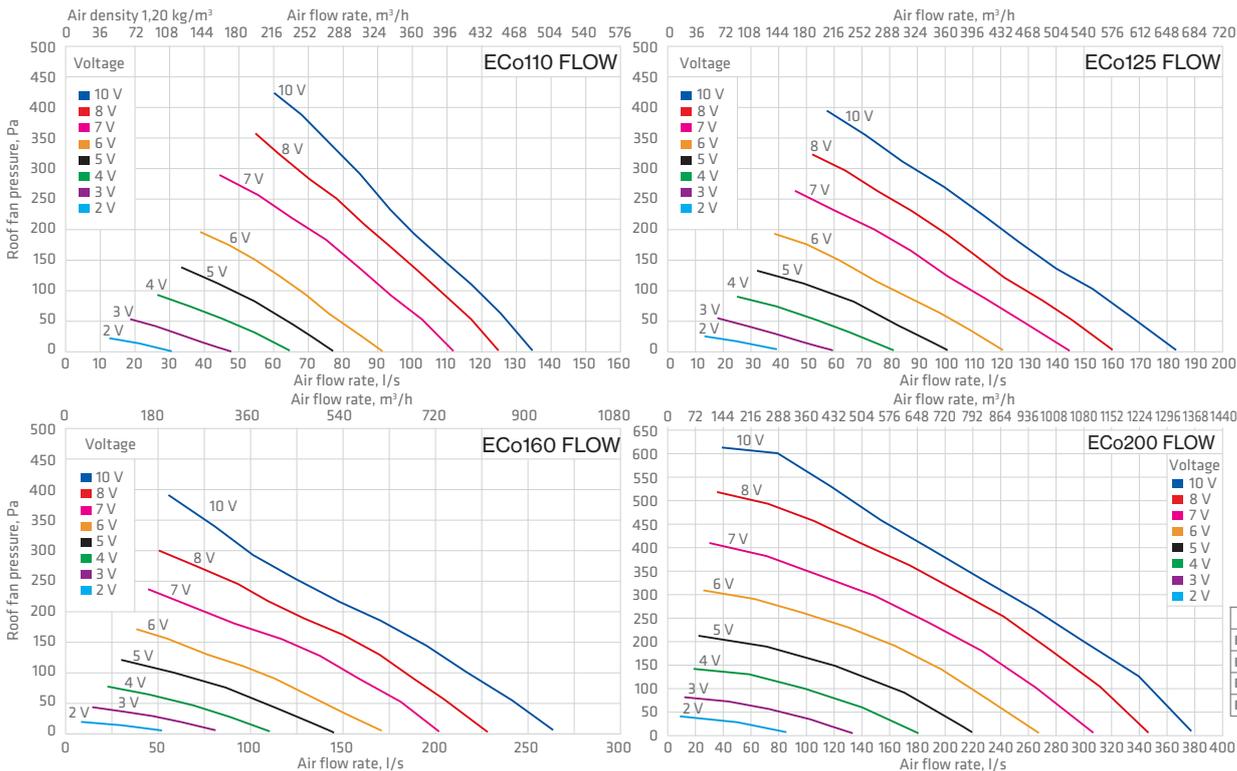

	mm	A	B	C	D	E	F
ECO110P FLOW		310	225	110	394	759	1041
ECO125P FLOW		310	225	125	394	759	1041
ECO160P FLOW		310	225	160	394	759	1041
ECO200P FLOW XL		400	305	200	456	869	1105

VILPE® E190P/Ø125/500 ROOF FAN

Description: Insulated roof fan. Includes a perforated, galvanized steel inner pipe with a lip seal. The pipe has a 50-mm built-in silencer. VILPE pass-throughs suitable for a range of roofing types and material are available separately. VILPE P-series roof fans are compatible with all VILPE pass-through set types, although please note that P-series XL roof fans require an XL pass-through.

Dimensions: Duct size Ø 125 mm, external Ø 225 mm, height above roof approx. 500 mm.

Contents: Roof fan, screws, installation, operating and maintenance instructions.

Black	1	24*	Stock	73592
Grey	1	24*	Stock	73597
Red	1	12	Stock	73598
Brick Red	1	12	Stock	73599






VILPE® E220P/Ø160/500 ROOF FAN

Description: Insulated roof fan. Includes a galvanized steel inner pipe with a lip seal. VILPE pass-throughs suitable for a range of roofing types and material are available separately. VILPE P-series roof fans are compatible with all VILPE pass-through set types, although please note that P-series XL roof fans require an XL pass-through.

Dimensions: Duct size Ø 160 mm, external Ø 225 mm, height above roof approx. 500 mm.

Contents: Roof fan, screws, installation, operating and maintenance instructions.

Black	1	24*	Stock	73472
Grey	1	12	Stock	73477
Red	1	12	Order	73478
Brick Red	1	24*	Stock	73479
Light Grey	1	24*	Order	73471

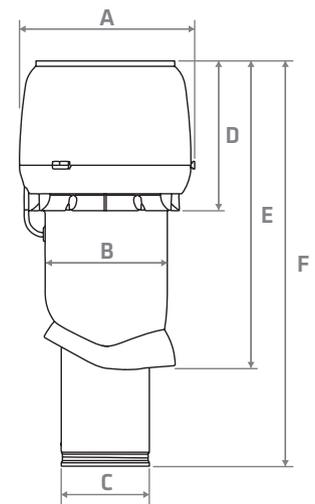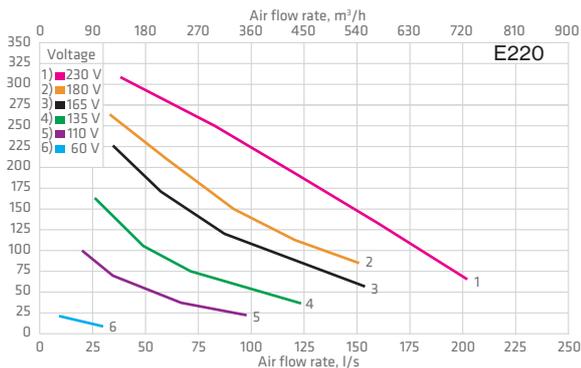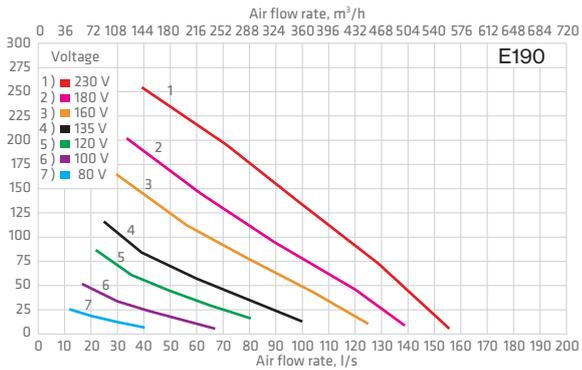

mm	A	B	C	D	E	F
E120	257	160	125	221	576	724
E190	310	225	125	273	564	738
E220	310	225	160	273	564	738



VILPE® ECO 110S FLOW ROOF FAN + INSTALLATION SET 300 X 300

Description: Energy-efficient roof fan with FLOW cowl and EC motor for radon ventilation. Also suitable for ventilating a garage or an ecological toilet. Compatible with the VILPE 110 mm insulated pipe or other pipes with external dimensions of Ø 160 mm. A separate control panel—either the VILPE ECo Ideal Wireless or the VILPE ECo Controller 0–10 V—is needed to adjust the roof fan. An installation set for a flat surface is included with this product.

Dimensions: Duct size Ø 110 mm; installation set 300 x 300 mm, installation area must be at least the same size.

Contents: Roof fan, installation set, screws, installation, operating and maintenance instructions.

Grey	1	15	Stock	350287
Black	1	15	Stock	350282
Red	1	15	Order	350288
Brick Red	1	15	Order	350289
Light Grey	1	15	Stock	350281



VILPE® ECO 125S FLOW ROOF FAN + INSTALLATION SET 300 X 300

Description: Energy-efficient roof fan with FLOW cowl and EC motor (with 0-10V control voltage) for the top of an air conduit or silencer. An installation set for a flat surface is included with this product. VILPE ECo Controller control panel available separately.

Dimensions: Duct size Ø 125 mm; installation set 300 x 300 mm, installation area must be at least the same size.

Contents: Roof fan, installation set, screws, installation, operating and maintenance instructions.

Black	1	15	Stock	350202
Grey	1	15	Stock	350207
Red	1	15	Order	350208
Brick Red	1	15	Order	350209
Light Grey	1	15	Stock	350201



VILPE® ECO 160S FLOW ROOF FAN + INSTALLATION SET 300 X 300

Description: Energy-efficient roof fan with FLOW cowl and EC motor (with 0-10V control voltage) for the top of an air conduit or silencer. An installation set for a flat surface is included with this product. VILPE ECo Controller control panel available separately.

Dimensions: Duct size Ø 160 mm; installation set 300 x 300 mm, installation area must be at least the same size.

Contents: Roof fan, installation set, screws, installation, operating and maintenance instructions.

Black	1	15	Stock	350212
Grey	1	15	Stock	350217
Red	1	15	Order	350218
Brick Red	1	15	Order	350219
Light Grey	1	15	Stock	350211





VILPE® ECO 200S FLOW ROOF FAN + INSTALLATION SET 400 X 400

Description: Energy-efficient insulated roof fan with FLOW cowl and EC motor (with 0-10V control voltage) for the top of an air conduit or silencer. If installed on a flat surface a separate installation set is required.

Dimensions: Duct size Ø 200 mm; installation set 400 x 400 mm, installation area must be at least the same size.

Contents: Roof fan, installation set, screws, installation, operating and maintenance instructions.

Black	1	8	Stock	350312
Grey	1	8	Stock	350317
Red	1	8	Order	350318
Brick Red	1	8	Order	350319

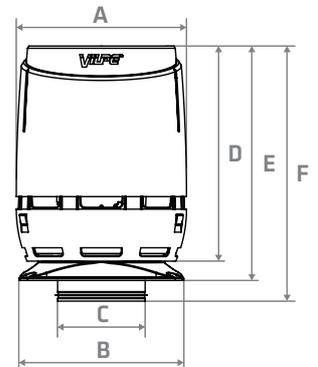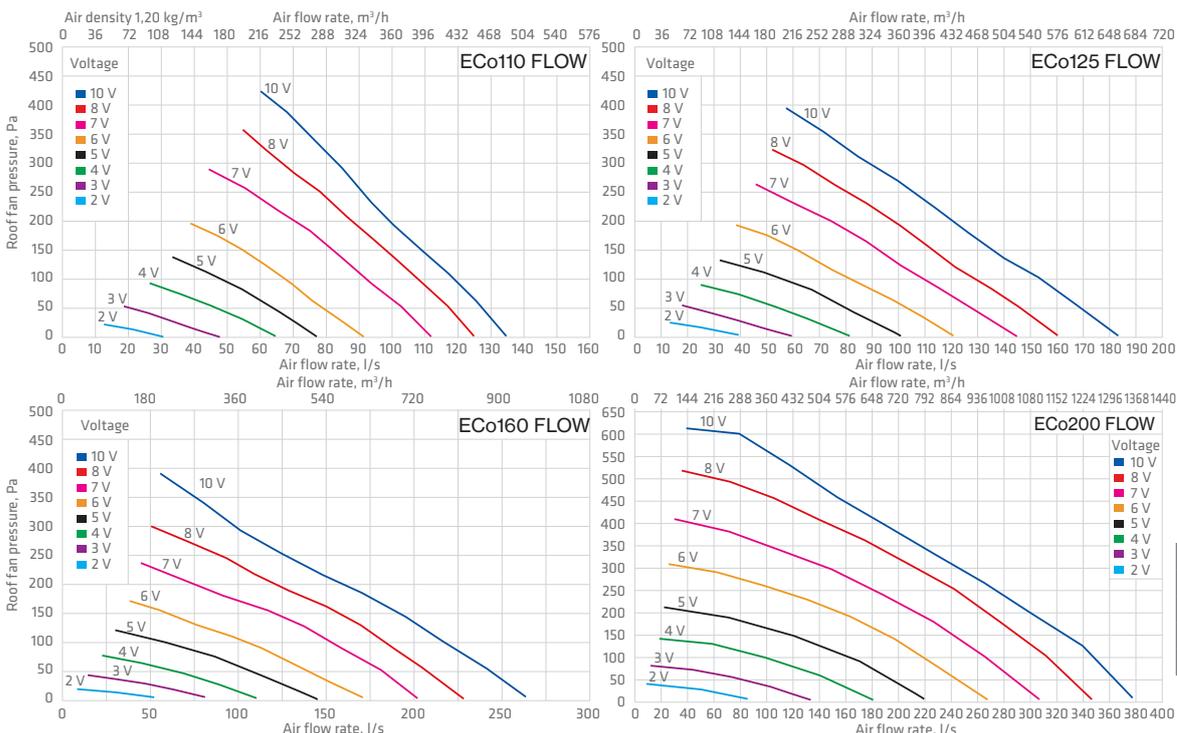

	mm					
	A	B	C	D	E	F
ECO110S FLOW	310	300	110	394	441	461
ECO125S FLOW	310	300	125	394	441	461
ECO160S FLOW	310	300	160	394	441	461
ECO200S FLOW	400	395	200	456	524	560

VILPE® E190S/Ø125 ROOF FAN + INSTALLATION SET

Description: Roof fan for the top of an air conduit or silencer. An installation set for a flat surface is included with this product.

Dimensions: Duct size Ø 125 mm; installation set 300 x 300 mm, installation area must be at least the same size.

Contents: Roof fan, installation set, screws, installation, operating and maintenance instructions.

Black	1	24*	Stock	737522
Grey	1	24*	Stock	737527
Red	1	12	Order	737528
Brick Red	1	12	Stock	737529
Light Grey	1	12	Order	737521





VILPE® E220S/Ø160 ROOF FAN + INSTALLATION SET

Description: Roof fan for the top of an air conduit or silencer. An installation set for a flat surface is included with this product.


Dimensions: Duct size Ø 160 mm; installation set 300 x 300 mm, installation area must be at least the same size.

Contents: Roof fan, installation set, screws, installation, operating and maintenance instructions.

Black	1	24*	Stock	737502
Grey	1	24*	Stock	737507
Red	1	12	Order	737508
Brick Red	1	12	Stock	737509
Light Grey	1	12	Order	737501

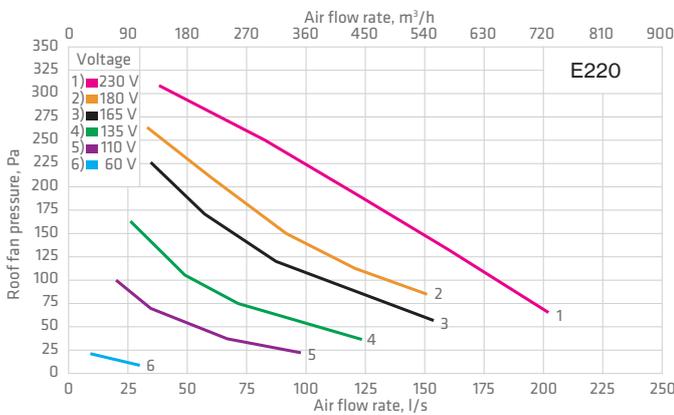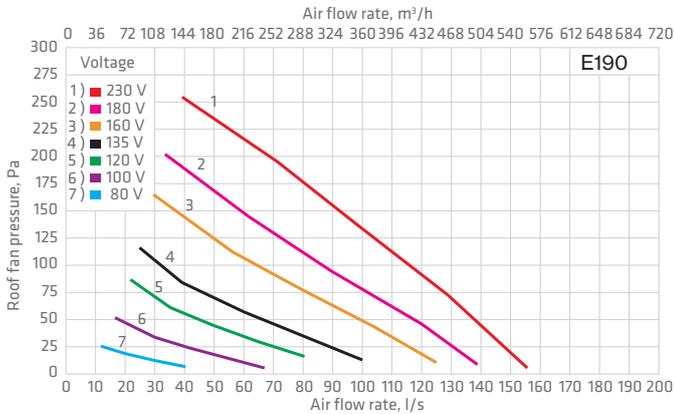

mm	A	B	C	D	E	F
E190	310	300	125	273	328	351
E220	310	300	160	273	328	358

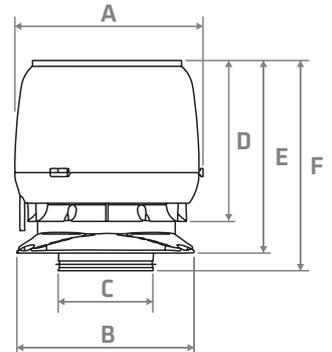

Chimney fan

VILPE® TI-17 CHIMNEY FAN

Description: VILPE chimney fan with black aluminium cast housing and silumin compound propeller. Effectively removes smoke caused by fireplaces, heaters, wood stoves and ovens, allowing them to operate at ideal efficiency and prevent smoke from spreading indoors. Monitored and adjusted by a step transformer or a thyristor regulator which should be installed as close to the fireplace as possible. As the fan is installed on an insulation sheet on top of the chimney, it should only be used when there is a fire in the fireplace; ventilating after the fire has died down is also recommended.

Suitable for fireplaces with max. 0.35 m² clear opening area. Minimum size of flue opening 100 x 100 mm, maximum 230 x 230 mm. Highest portable gas temperature 200°C. Not suitable for round steel chimneys.

Contents: Chimney fan.

1	36	Stock	735098
---	----	-------	--------



Quick selection for the VILPE® roof fans

Selecting a roof fan for residential ventilation

A general recommendation is that the indoor air should be substituted completely every other hour. The exhaust air, removed by the roof fan, is replaced with fresh air coming in through intake vents in various rooms.

A rule of thumb is that a ducting system of a 120–150 m² house has a loss of compression of ca 100 Pa. A fast way to calculate the accurate loss of compression in pascals is to calculate 5 Pa per meter of ducting (including terminal equipment of ducting, bends, etc.)

The loss of compression (Pa) depends on the length and diameter of piping but also on the number of corners and the speed of airflow. Recommended ventilation is achieved with the roof fan functioning at 70% of maximum capacity.

The table is indicative only.

m² maximum size

Roof fan	Duct	50 Pa	100 Pa	150 Pa
ECo125 FLOW / ECo190	Ø 125 mm	360 m ²	340 m ²	310 m ²
ECo160 FLOW / ECo220	Ø 160 mm	490 m ²	440 m ²	390 m ²
ECo200 FLOW / ECo250	Ø 200 mm	660 m ²	630 m ²	600 m ²
E190	Ø 125 mm	270 m ²	230 m ²	180 m ²
E220	Ø 160 mm	410 m ²	360 m ²	300 m ²

Selecting a roof fan for a cooker hood

Indoor air and ventilation recommendations (in Finland) state a cooker hood should work 25 litres of air per second. The noise level in the kitchen should not exceed 33 dB (or 43 dB if heightened). Accurate data on loss of compression in the cooker hood (and its ducts) should be available from the manufacturer.

The table is indicative only.

Roof fan	Duct	Free flow	50 Pa	100 Pa
ECo125 FLOW	Ø 125 mm	185 l/s (666 m ³ /h)	170 l/s (612 m ³ /h)	155 l/s (558 m ³ /h)
ECo160 FLOW	Ø 160 mm	265 l/s (954 m ³ /h)	245 l/s (882 m ³ /h)	220 l/s (792 m ³ /h)
ECo200 FLOW	Ø 200 mm	380 l/s (1368 m ³ /h)	365 l/s (1314 m ³ /h)	348 l/s (1253 m ³ /h)
E190	Ø 125 mm	155 l/s (558 m ³ /h)	138 l/s (497 m ³ /h)	116 l/s (418 m ³ /h)
E220	Ø 160 mm	236 l/s (850 m ³ /h)	212 l/s (763 m ³ /h)	180 l/s (648 m ³ /h)

Electrical data of roof fans

E190, E220

Main supply
230V 50Hz, AC


L brown
N blue
PE green/yellow



ECo110

Main supply
230V 50Hz, AC

L brown
N blue
PE green/yellow

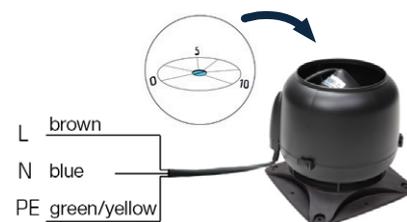

ECo110 FLOW, ECo125 FLOW, ECo160 FLOW, ECo200 FLOW

Main supply
230V 50Hz, AC

L brown
N blue
PE yellow/green



Control cable

Voltage output +10 V max. 11 mA red
Lin/PWM control input 0-10 VDC / PWM yellow
GND blue
Tach output (1 pulse/revolution) white counter/controller/alarm/speed display




ECo190, ECo220, ECo250

Main supply
230V 50Hz, AC

L brown
N blue
PE yellow/green

Control cable

Voltage output +10 V max. 11 mA red
Lin/PWM control input 0-10 VDC / PWM yellow
GND blue
Tach output (1 pulse/revolution) white counter/controller/alarm/speed display

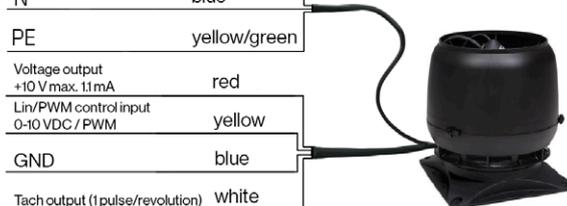

VILPE® model	Power input	Current	Voltage	Capacitor	Rotation speed
E190	52 W	0.23 A	230 V, 50 HZ	1.5 µF	2350 rpm
E220	88 W	0.39 A	230 V, 50 HZ	2 µF	2100 rpm
ECo110 / ECo110 FLOW	83 W	0.75 A	230 V, 50 HZ	-	3200 rpm
ECo190 / ECo125 FLOW	83 W	0.75 A	230 V, 50 HZ	-	3200 rpm
ECo220 / ECo160 FLOW	85 W	0.70 A	230 V, 50 HZ	-	2580 rpm
ECo250 / ECo200 FLOW	170 W	1.40 A	230 V, 50 HZ	-	2510 rpm

INTELLIGENT VENTILATION IS AN ESSENTIAL PART OF HUMIDITY MANAGEMENT

A structurally sound roof and proper ventilation are effective ways to prevent moisture from accumulating in a building's structures and insulation.

'If water drips onto the breakfast table, we can quickly spot the leaking roof and repair the damage. But if there is a small leak somewhere and moisture is allowed to accumulate in the structure for six months, it may not be noticed until the whole roof is wet,' says Veli-Pekka Lahti, Director of Research and Development at VILPE.

Improper ventilation makes the problem worse

Moisture accumulation is affected by humidity, air leakage and the size of ventilation spaces. The sooner latent damage is detected, the easier and cheaper it is to repair.

'Long autumns and small temperature differences cause moisture to accumulate in structures. At the dew point, water vapour condenses into water, which is difficult to remove from structures. We have collected a lot of data showing that if you ventilate at the wrong time, moisture is sucked in too,' Lahti says.

Intelligent ventilation meets the challenges of seasonal and weather variation. When humidity levels rise, the VILPE Sense smart roof system increases ventilation in structures and insulation layers, and improves passive air circulation.

Rising humidity levels in structures are detected by the wireless sensors and transmitted over to the control unit. It then adjusts the

VILPE ECO roof fan to the optimum fan level based on the ventilation demand, the outdoor air temperature and the relative humidity. For example, when the humidity level of the air used for ventilation rises too high in rainy weather, the airflow is reduced. Once the excess humidity is removed, the roof fan returns to its normal level.

A smart roof extends the life of a building

Hidden problems in the ventilation of structures are difficult to detect. Monitoring and utilizing data can be used to address anomalies, find hidden faults and anticipate maintenance. A structural moisture management system is therefore part of responsible construction and building maintenance.


VILPE Sense smart roof is the first product on the market to help both detect and prevent moisture damage by measuring the relative humidity and temperature of structures – for example in roof structures or the lower levels of the building – and providing unbiased, measurable data to support repair decisions. The system enables accurate and methodical monitoring of the condition of roofs and lower levels of the building.

The data collected can also be used by property owners, the residents' board of the apartment building, property managers and renovation companies, for example when a building is sold or maintenance is transferred from one company to another.

Benefits of the Sense system

- ◆ Automatic monitoring and ventilation of constructions
- ◆ Drying of the insulation and constructions
- ◆ Prevents growth of mould and fungi
- ◆ Less unplanned renovations

> VILPE.COM/SENSE

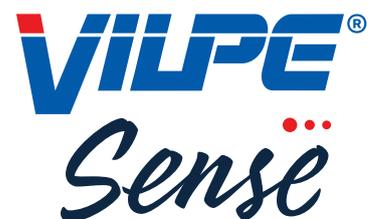

VILPE® SENSE **NEW**

Description: Consists of two sensors and a control unit which are linked to an ECO Roof fan. This smart system detects and alerts you to potential leakages and other humidity problems, for instance on the roof or underfloor. The system also dries the insulation layer when necessary. Through the VILPE Sense application, you can check the condition of one or several buildings at any time.
Contents: Steering device, two sensors.

Model	Pcs/pack	Delivery	Product No.
Basic kit	1	Stock	735042
Extra sensor	1	Stock	735041
	1	Stock	735043
	1	Order	741982



VILPE® SENSE MOBILE BASE STATION **NEW**

Description: Receives VILPE sense data from smart roof system's sensors and control unit, and uploads this directly to VILPE's cloud service for storage and analysis.



VILPE® ECO SENSE ROOF FAN **NEW**

Description: VILPE's ECO Sense roof fan is installed on a roof's negative pressure ventilation pipe. A VILPE Sense control unit and two sensors are connected to a roof fan. The roof fan adjusts automatically based on the data sent to it by the sensors, which allows for demand-controlled ventilation. Control voltage 0-10 V. EC motor.



Dimensions: Duct size Ø 110 mm, external Ø 257 mm. Height above roof 670 mm when installed on top of a negative pressure air vent.

Contents: Roof fan, screws, installation, operating and maintenance instructions.



VILPE® ECo Ideal Wireless



AUTOMATICALLY CONTROLS THE VENTILATION IN YOUR HOUSE

Whether you are renovating or building from scratch, the demand-controlled and energy saving VILPE® ECo Ideal Wireless is an excellent choice for an easy and budget-friendly implementation for your ventilation needs. ECo Ideal Wireless is well-suited for both old and new buildings and is an excellent solution for ventilation of warehouses and garages.

The ventilation control system automatically adjusts ventilation to always secure excellent air quality while at the same time saving energy. The product's wireless sensors measure the relative humidity (RH) and carbon dioxide (CO2) levels in the air and automatically send this information to the control unit.

VILPE® ECo Ideal Wireless system is an ideal solution if you wish to convert an existing natural ventilation system to a mechanical ventilation system. It is also an easy and cost-efficient opportunity to turn a mechanical ventilation system into a demand-controlled ventilation system that saves you both energy and money.

The VILPE® ECo Ideal Wireless ventilation solution comprises the ECo Ideal Wireless control unit and RH Sensor and, if necessary, a CO2 Sensor. The VILPE® ECo Ideal Wireless system is used together with VILPE® ECo roof fan (and a potential VILPE® roof pass-through).

DEMAND-CONTROLLED VENTILATION

- Automatically adjusted
- Wireless sensors and user panel
- Payback period 5 years
- Saves electricity*
- VILPE® guarantees

USAGE

- For builders and renovators
- Ventilation of humid spaces
- Ventilation of the garage
- Improving the efficiency of existing ventilation systems

*Example: Ventilation of a 120 m² house with VILPE® ECo roof fan + *ECo Ideal Wireless* vs. ventilation with AC roof fan results in energy savings of 2600 kWh/y.

Controllers

VILPE® ECO IDEAL WIRELESS VENTILATION CONTROL

Description: Wireless control system for demand-controlled ventilation. Can be used to control VILPE ECo roof fans. Carbon dioxide sensors (CO2) sold separately.
Contents: Wireless User Panel (UP), Control Unit (CU), Wireless Relative Humidity Sensor (RH), installation instructions.

Delivery Product No.

Stock 735030



VILPE® ECO IDEAL WIRELESS RH SENSOR

Description: Relative Humidity sensor for the VILPE ECo Ideal Wireless demand-controlled ventilation system.
Contents: Relative Humidity (HR) sensor, installation instructions.

Stock 735031



VILPE® ECO IDEAL WIRELESS CO2 SENSOR

Description: Carbon dioxide sensor for the VILPE ECo Ideal Wireless demand-controlled ventilation system.
Contents: Carbon dioxide (CO2) sensor, installation instructions.

Stock 735032



VILPE® ECO IDEAL WIRELESS CU CONTROL UNIT

Description: A Control unit for the VILPE® ECo Ideal Wireless demand controlled ventilation system.
Contents: Control unit (CU), installation instructions.

Stock 735033



VILPE® ECO IDEAL WIRELESS UP USER PANEL

Description: A User panel for the VILPE® ECo Ideal Wireless demand controlled ventilation system.
Contents: User panel (UP), installation instructions.

Stock 735034



Controllers



	Delivery	Product No.	
VILPE® ECO POTENTIOMETER Description: Potentiometer for stepless steering of VILPE ECo roof fan speed. Voltage signal 0-10 V; surface installation only. Dimensions: 86 x 86 x 39 mm. Contents: Controller, instructions.	Stock	735038	
VILPE® ECO CONTROLLER 0-10V Description: Controller for stepless manual control of VILPE ECo roof fan speed. Voltage signal 0-10 V; suitable for both flush and surface mounting. Contents: Controller.	Stock	735028	
VILPE® ECo MONITOR DRIVE CONTROLLER Description: Printed Circuit Board (PCB) for controlling VILPE ECo roof fan operation. Can monitor rotation speed signals from 1-5 fans; multiple boards can also be linked together to allow for the monitoring of more fans. Functions include an isolated alarm output with a 15-20 second alarm threshold for one tachometer pulse per revolution, as well as a faulty fan LED. Adjustable 0-10 V speed control input and 10 V 1 mA operating voltage which can also be provided by the fan itself (Patent 2431303). Four fixing holes are available for mounting. Contents: ECo Monitor, instructions.	Stock	735029	
VILPE® PRESSURE CONTROLLER 24 V Description: Measures and adjusts air flow pressure in ventilation ducts. Compatible with VILPE EC fans, and particularly suitable for multi-storey buildings. Dimensions: 78 x 90 x 40 mm. Contents: Pressure controller, installation instructions, hose, 2x measuring gauges.	Controller Stock	735036	
	Power supply Stock	735037	
VILPE® DESKTOP CO2 MONITOR Description: Desktop unit for measuring CO2 concentration and temperature in ambient air. Smart, compact and easy-to-use; data can be saved when connected to a computer. Contents: Monitor, USB cable, instructions.	Stock	735035	
VILPE® AC CONTROLLER NEW Description: For adjusting the rotation speed of a roof fan. Surface and flush mounting. IP 20. Contents: Controller.	Stock	735023	

Service sets


	Pcs/pack	Delivery	Product No.	
VILPE® E150/E80 ROOF FANS SERVICE SET	1	Stock	735052	
VILPE® E190/E120 ROOF FANS SERVICE SET	1	Stock	735050	
VILPE® E220 ROOF FANS SERVICE SET	1	Stock	735054	
VILPE® E250 ROOF FANS SERVICE SET	1	Order	735055	
VILPE® E280 ROOF FANS SERVICE SET	1	Order	735056	
VILPE® E310 ROOF FANS SERVICE SET	1	Order	735057	
VILPE® RADON ROOF FANS SERVICE SET	1	Stock	735053	
VILPE® ECO110/190 ROOF FAN SERVICE SET	1	Stock	735058	
VILPE® ECO220 ROOF FAN SERVICE SET	1	Stock	735059	
VILPE® ECO250 ROOF FAN SERVICE SET	1	Order	735060	
VILPE® ECO110/125 FLOW ROOF FAN SERVICE SET	1	Stock	735061	
VILPE® ECO160 FLOW ROOF FAN SERVICE SET	1	Stock	735062	
VILPE® ECO200 FLOW ROOF FAN SERVICE SET	1	Stock	735063	
VILPE® 1,5µF CONDENSER	1	Order	735003	
VILPE® 2µF CONDENSER	1	Order	735004	
VILPE® 3µF CONDENSER	1	Order	735006	
VILPE® 6µF CONDENSER	1	Order	735008	




	Colour	Pcs/pack	Pcs/pallet	Delivery	Product No.	
VILPE® 110P/300 FLOW VENTILATION PIPE + COWL Description: Uninsulated ventilation pipe with FLOW cowl. VILPE pass-throughs suitable for a range of roofing types and material are available separately. Dimensions: Duct size Ø 110 mm, height above roof approx. 300 mm. Contents: Ventilation pipe, screws, FLOW cowl.	Black	10	80*	Stock	350232	
	Brown	10	80*	Stock	350234	
	Grey	10	80*	Stock	350237	
	Red	10	40	Stock	350238	
	Brick Red	10	40	Stock	350239	
	Light Grey	10	40	Stock	350231	
	Anthracite	10	80*	Stock	35023G	
VILPE® 110P/IS/350 FLOW VENTILATION PIPE + COWL Description: Insulated ventilation pipe with FLOW cowl. VILPE pass-throughs suitable for a range of roofing types and material are available separately. Dimensions: Duct size Ø 110 mm, height above roof approx. 500 mm. Contents: Ventilation pipe, screws, FLOW cowl.	Black	4	32*	Stock	350292	
	Grey	4	32*	Stock	350297	
	Red	4	32*	Stock	350298	
	Brick Red	4	32*	Stock	350299	
	Anthracite	4	32*	Stock	35029G	
VILPE® 110P/300 VENTILATION PIPE Description: Uninsulated ventilation pipe without a cowl. VILPE pass-throughs suitable for a range of roofing types and material are available separately. Dimensions: Duct size Ø 110 mm, height above roof approx. 300 mm. Contents: Ventilation pipe, screws.	Black	20	80	Order	74122	
	Grey	20	80	Order	74127	
	Red	20	80	Order	74128	
	Brick Red	20	80	Order	74129	
	Light Grey	20	80	Order	74121	
VILPE® 110P/500 VENTILATION PIPE Description: Uninsulated ventilation pipe. A pass-through according to the roofing material is required separately. A VILPE Cowl-110 is required for ventilation of attic space and roof structures. Dimensions: Duct size Ø 110 mm, height above roof approx. 500 mm. Contents: Ventilation pipe, screws.	Black	14	112*	Stock	74110	
VILPE® 110P/IS/500 VENTILATION PIPE Description: Insulated sewer ventilation pipe without a cowl. VILPE pass-throughs suitable for a range of roofing types and material are available separately. Dimensions: Duct size Ø 110 mm, external Ø 160 mm, height above roof approx. 500 mm. Contents: Ventilation pipe, screws.	Black	12	96*	Stock	74161	
VILPE® 160P/500 VENTILATION PIPE Description: Uninsulated ventilation pipe without a cowl. VILPE pass-throughs suitable for a range of roofing types and material are available separately. Dimensions: Duct size Ø 160 mm, height above roof approx. 500 mm. Contents: Ventilation pipe, screws.	Black	12	48	Stock	74160	

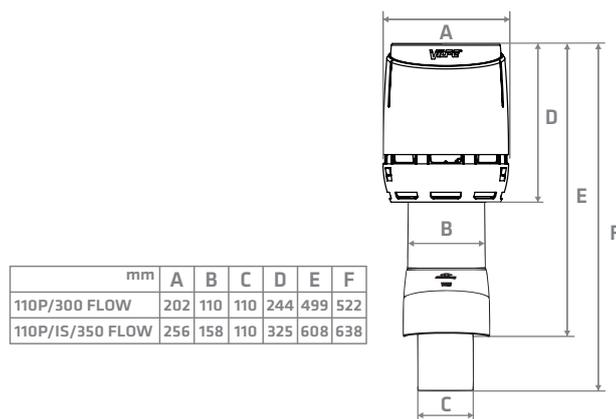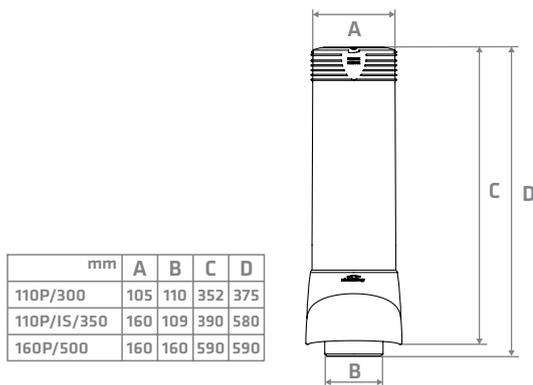


	Colour	Pcs/pack	Pcs/pallet	Delivery	Product No.	
VILPE® FLOW COWL 110 Description: FLOW cowl for VILPE ventilation pipe with external dimensions Ø 110 mm. Contents: Cowl.	Black	22	144*	Stock	350222	
	Grey	22	144*	Stock	350227	
	Red	22	72	Stock	350228	
	Brick Red	22	72	Stock	350229	
	Light Grey	22	72	Stock	350221	
VILPE® FLOW COWL 160 Description: FLOW cowl for VILPE ventilation pipe with external dimensions Ø 160 mm (i.e. insulated pipe for duct sizes Ø 110 or Ø 125 mm). The cowl serves as a radon ventilator when attached to a Ø 110 insulated pipe. Contents: Cowl.	Black	10	80*	Stock	350072	
	Grey	10	80*	Stock	350077	
	Red	10	40	Stock	350078	
	Brick Red	10	40	Stock	350079	
	Light Grey	10	40	Stock	350071	
VILPE® AP COWL FLOW 160 Description: FLOW cowl for VILPE 160P/500 ventilation pipe with external dimensions Ø 160 mm. Contents: Cowl.	Black	12	72*	Stock	731622	
	Grey	12	72*	Stock	731627	
	Red	12	72*	Stock	731628	
	Brick Red	12	72*	Stock	731629	
VILPE® COWL 75 Description: Cowl for a pipe with external dimensions Ø 75 mm. Contents: Cowl.	Black			Order	731142	
VILPE® AP COWL 110 Description: Rain cowl for VILPE 160P/500 Ventilation pipe with external dimensions Ø 160 mm. Contents: Cowl.	Black		312*	Order	73112	
VILPE® FREEZE COVER 110/475 Description: Insulation cover for old Ø 110 sewer ventilation pipes. Renews pipes' appearance and colour. Dimensions: External Ø 160 mm, height 475 mm. Contents: Freeze cover, screws.	Black	15	120*	Stock	74172	
	Grey	15	120*	Stock	741747	
	Red	15	60	Stock	741748	
	Brick Red	15	60	Stock	741749	
VILPE® FLEX PIPE 110 Description: Used to connect a VILPE Ventilation Pipe to a Ø 110 mm drainage pipe. Dimensions: Ø 110 mm. Contents: Flex pipe, fixing clamps.		1	360	Stock	74204	
VILPE® ADAPTER 75/110 Description: Used to connect a Ø 110 VILPE Flex Pipe to a Ø 75 mm pipe. Dimensions: Ø 75/110 mm. Contents: Adapter.		20	240	Stock	74203	




mm	A	B	C
FLOW Cowl 110	202	244	110
FLOW Cowl 160	256	325	160



mm	A	B	C
Flex pipe	110	75	128



mm	A	B	C
Cowl 75	137	135	75

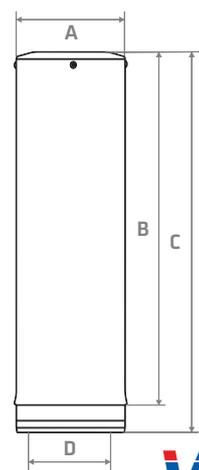

mm	A	B	C	D
Freeze cover	160	449	484	110



VILPE® 125P/IS/500 FLOW EXHAUST VENTILATION PIPE

Description: Insulated exhaust ventilation pipe with FLOW cowl. Includes a galvanized steel inner pipe with a lip seal. VILPE pass-throughs suitable for a range of roofing types and material are available separately.
Dimensions: Duct size Ø 125 mm, external Ø 160 mm, height above roof approx. 500 mm.
Contents: Exhaust ventilation pipe, FLOW cowl, screws.

VILPE® 160P/IS/500 FLOW EXHAUST VENTILATION PIPE

Description: Insulated exhaust ventilation pipe with FLOW cowl. Includes a galvanized steel inner pipe with a lip seal. VILPE pass-throughs suitable for a range of roofing types and material are available separately.
Dimensions: Duct size Ø 160 mm, external Ø 225 mm, height above roof approx. 500 mm.
Contents: Exhaust ventilation pipe, FLOW cowl, screws.

VILPE® 160P/ER/500 FLOW XL EXHAUST VENTILATION PIPE

Description: Insulated XL exhaust ventilation pipe with FLOW cowl. Includes a galvanized steel inner pipe with a lip seal. VILPE pass-throughs suitable for a range of roofing types and material are available separately.
Dimensions: Duct size Ø 160 mm, external Ø 300 mm, height above roof approx. 500 mm.
Contents: Exhaust ventilation pipe, FLOW cowl, screws.

VILPE® 200P/500 FLOW XL EXHAUST VENTILATION PIPE

Description: Insulated XL exhaust ventilation pipe with FLOW cowl. Includes a galvanized steel inner pipe with a lip seal. VILPE pass-throughs suitable for a range of roofing types and material are available separately.
Dimensions: Duct size Ø 200 mm, external Ø 300 mm, height above roof approx. 500 mm.
Contents: Exhaust ventilation pipe, FLOW cowl, screws.

VILPE® 250P/500 FLOW XL EXHAUST VENTILATION PIPE

Description: Insulated XL exhaust ventilation pipe with FLOW cowl. Includes a galvanized steel inner pipe with a lip seal. VILPE pass-throughs suitable for a range of roofing types and material are available separately. This exhaust ventilation pipe can be used with XL pass-throughs but will not be fully insulated, as the ventilation duct is approximately 25 cm larger than the pass-through.
Dimensions: Duct size Ø 250 mm, external Ø 300 mm, height above roof approx. 500 mm.
Contents: Exhaust ventilation pipe, FLOW cowl, screws.

Colour Pcs/pack Pcs/pallet Delivery Product No.

Black	1	32*	Stock	350042
Grey	1	32*	Stock	350047
Red	1	32*	Stock	350048
Brick Red	1	32*	Stock	350049
Light Grey	1	32*	Stock	350041
Anthracite	1	32*	Stock	35004G



Black	1	24*	Stock	350052
Grey	1	24*	Stock	350057
Red	1	24*	Stock	350058
Brick Red	1	24*	Stock	350059
Light Grey	1	24*	Stock	350051
Anthracite	1	24*	Stock	35005G




Black	1	4	Order	350102
Grey	1	4	Order	350107
Red	1	4	Order	350108
Brick Red	1	4	Order	350109




Black	1	6	Stock	350132
Grey	1	6	Stock	350137
Red	1	6	Order	350138
Brick Red	1	6	Order	350139
Anthracite	1	6	Order	35013G




Black	1	6	Order	350152
Grey	1	6	Stock	350157
Red	1	6	Order	350158
Brick Red	1	6	Order	350159

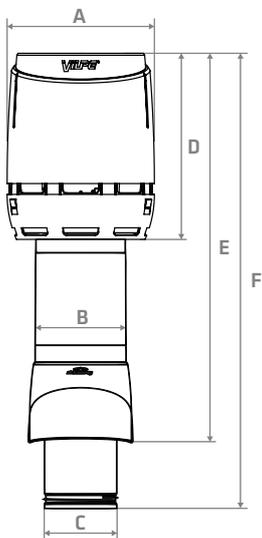


mm	A	B	C	D	E	F
125P/500 FLOW	256	158	125	325	608	753
160P/500 FLOW	310	224	160	394	639	841
160P/500 FLOW XL	400	305	160	456	870	1098
200P/500 FLOW XL	400	305	200	456	869	1105
250P/500 FLOW XL	400	305	250	456	868	1111

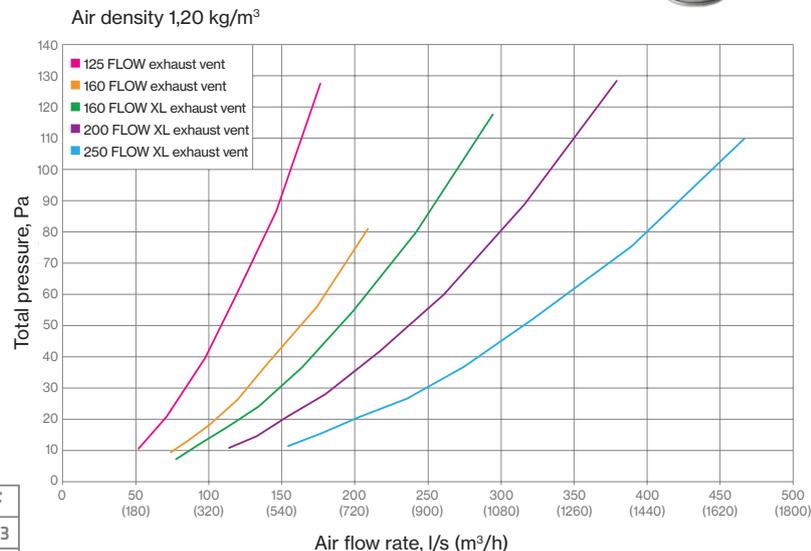

	Colour	Pcs/pack	Pcs/pallet	Delivery	Product No.	
VILPE® 125S 250X250 FLOW EXHAUST VENT Description: Exhaust vent for a flat surface with FLOW cowl. Dimensions: Duct size Ø 125 mm; installation set 250 x 250 mm, installation area must be at least the same size. Contents: Exhaust vent, installation set, adapter and screws.	Black	1	24	Stock	350012	
	Grey	1	48*	Stock	350017	
	Red	1	24	Order	350018	
	Brick Red	1	24	Order	350019	
	Light Grey	1	24	Stock	350011	
VILPE® 160S 300X300 FLOW EXHAUST VENT Description: Exhaust vent for a flat surface with FLOW cowl. Dimensions: Duct size Ø 160 mm; installation set 300 x 300 mm, installation area must be at least the same size. Contents: Exhaust vent, installation set, adapter and screws.	Black	1	15	Stock	350032	
	Grey	1	15	Stock	350037	
	Red	1	15	Order	350038	
	Brick Red	1	15	Order	350039	
	Light Grey	1	15	Stock	350031	
VILPE® 200S FLOW XL EXHAUST VENT Description: Exhaust vent for a flat surface with FLOW cowl. Dimensions: Duct size Ø 200 mm; installation set 400 x 400 mm, installation area must be at least the same size. Contents: Exhaust vent, installation set, adapter and screws.	Black	1	8	Stock	350162	
	Grey	1	8	Stock	350167	
	Red	1	8	Order	350168	
	Brick Red	1	8	Order	350169	
VILPE® 250S FLOW XL EXHAUST VENT Description: Exhaust vent for a flat surface with FLOW cowl. Dimensions: Duct size Ø 250 mm; installation set 400 x 400 mm, installation area must be at least the same size. Contents: Exhaust vent, installation set, adapter and screws.	Black	1	8	Stock	350172	
	Grey	1	8	Stock	350177	
	Red	1	8	Order	350178	
	Brick Red	1	8	Order	350179	

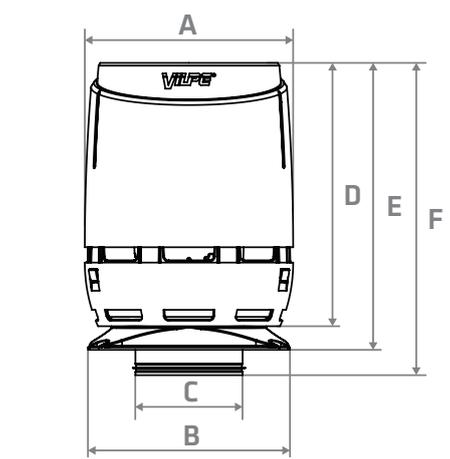

mm	A	B	C	D	E	F
125S FLOW	256	250	125	325	371	403
160S FLOW	310	300	160	394	441	461
200S FLOW	400	395	200	457	524	560
250S FLOW	400	395	250	457	524	560

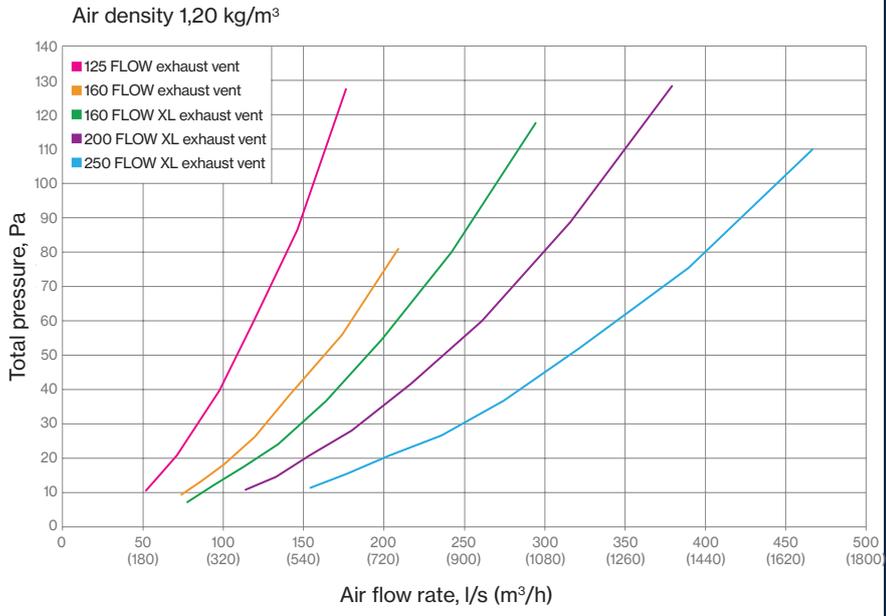

VILPE® FLOW

NEW 315-630S FLOW exhaust vents for industrial buildings and multi-apartment complexes- an all-in-one solution

315-630S EXHAUST VENTS

Duct sizes: Ø 315, 400, 500 and 630 mm

Excellent performance data

Excellent water separation

Made of light and durable polyethylene

Chemically resistant



READY-MADE PASS-THROUGHS

Sizes: 724 x 724 mm (Ø 315/400) and 970 x 970 mm (Ø 500/630)

Quick and easy to install

Made of film-faced plywood with sheet metal flashings for excellent water-tightness

Uncut baseplate allows adjustment for the ventilation duct




100 mm insulation layer with fire class a1

Fasteners and screws included

Ready-made steel flashing available

Built-in silencer

The VILPE 315-630S FLOW exhaust vents and ready-made pass-throughs provide an excellent all-in-one solution for larger ventilation projects. The products can be used as exhaust vents in new or renovated industrial buildings, apartment buildings, hotels, sports halls, or in other large buildings with a ventilation unit. Both the exhaust vents and the pass-throughs can be found in MagiCAD.

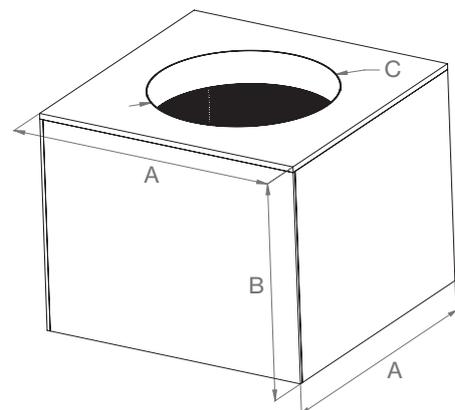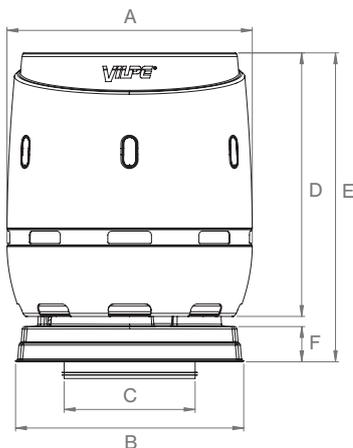

	A	B	C	D	E	F
315S FLOW EXHAUST VENT	Ø800	800	Ø315	865	1065	171
400S FLOW EXHAUST VENT	Ø800	800	Ø400	865	1065	173
500S FLOW EXHAUST VENT	Ø1180	1097	Ø500	1277	1497	170
630S FLOW EXHAUST VENT	Ø1180	1097	Ø630	1277	1497	170

	A	B	C
315S FLOW PASS-THROUGH SILENCER	724	800	Ø316
400S FLOW PASS-THROUGH SILENCER	724	800	Ø401
500S FLOW PASS-THROUGH SILENCER	970	801	Ø501
630S FLOW PASS-THROUGH SILENCER	970	801	Ø631



Colour Pcs/pack Pcs/pallet Delivery Product No.

VILPE® 315S FLOW EXHAUST VENT

Description: Exhaust vent with FLOW cowl. Installed on a square-shaped 724 x 724 mm pass-through. An assembled square-shaped VILPE pass-through with a silencer is also available.

Dimensions: Ø 315 mm.

Contents: Exhaust vent, installation set, Ø 315 mm galvanized steel connection pipe.

Black	1	1	Order	350402
Grey	1	1	Order	350407



VILPE® 400S FLOW EXHAUST VENT

Description: Exhaust vent with FLOW cowl. Installed on a square-shaped 724 x 724 mm pass-through. An assembled square-shaped VILPE pass-through with a silencer is also available.

Dimensions: Ø 400 mm.

Contents: Exhaust vent, installation set, Ø 400 mm galvanized steel connection pipe.

Black	1	1	Order	350412
Grey	1	1	Order	350417



VILPE® 500S FLOW EXHAUST VENT

Description: Exhaust vent with FLOW cowl. Installed on a square-shaped 970 x 970 mm pass-through. An assembled square-shaped VILPE pass-through with a silencer is also available.

Dimensions: Ø 500 mm.

Contents: Exhaust vent, installation set, Ø 500 mm galvanized steel connection pipe.

Black	1	1	Order	350432
Grey	1	1	Order	350437



VILPE® 630S FLOW EXHAUST VENT

Description: Exhaust vent with FLOW cowl. Installed on a square-shaped 970 x 970 mm pass-through. An assembled square-shaped VILPE pass-through with a silencer is also available.

Dimensions: Ø 630 mm.

Contents: Exhaust vent, installation set, Ø 630 mm galvanized steel connection pipe.

Black	1	1	Order	350442
Grey	1	1	Order	350447



VILPE® 315/400S FLOW PASS-THROUGH SILENCER

Description: Pass-through has a 100 mm insulation layer with an A1 fire rating. Includes fasteners, screws and a built-in silencer.

315S	1	1	Order	350421
400S	1	1	Order	350420



VILPE® 500/630S FLOW PASS-THROUGH SILENCER

Description: Pass-through has a 100 mm insulation layer with an A1 fire rating. Includes fasteners, screws and a built-in silencer.

500S	1	1	Order	350450
630S	1	1	Order	350451





VILPE® FLOW STEEL FLASHING SET FOR PASS-THROUGH

Description: Painted steel flashing enables a water-tight attachment of the pass-through to the roof material.

Dimension: ¹437x720 mm; ²437x966 mm.

Contents: Painted steel flashing set in black, corner covers.

¹ 315/400S	1	1	Order	350423
² 500/630S	1	1	Order	350453

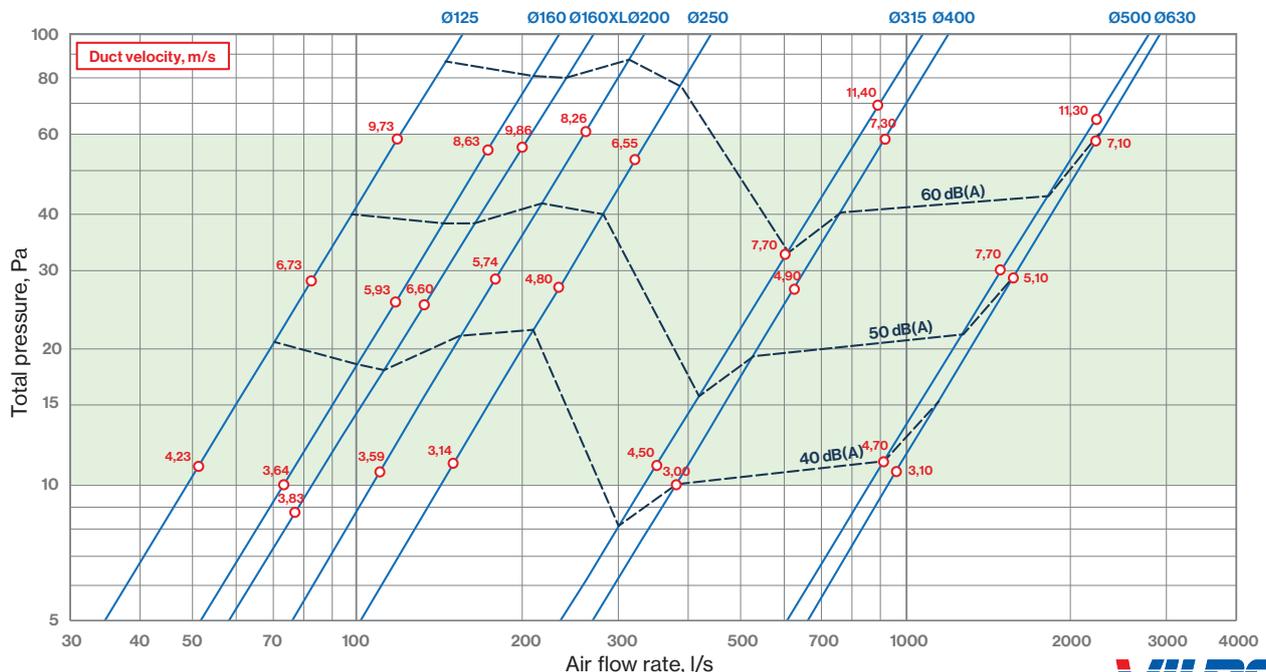

Fresh indoor air with
the intake vent

VILPE® WIVE

- Blends into the wall
- No additional maintenance required
- Draft free design
- Filters contaminants from the air
- Fast and easy filter change
- Easy installation
- With or without thermostat
- Silencer sold separately

VILPE Wive intake vent brings fresh outdoor air into the building, without the sense of draft. And what's best of all, the white intake vent can easily be wallpapered or painted to blend into the interior. Intake vents for window vents are now also available in the Wive-series.



VILPE®

Wive



10 year
warranty



> [VILPE.COM/WIVE](https://vilpe.com/wive)

BORÅSTAPETER

 TIKKURILA

The wallpaper in the pictures is Nocturne 6331 from Boråstapeter and the colour of the paint is V490 from Tikkurila.

VILPE® WIVE 100 INTAKE VENT SET THERMOSTAT

Description: The VILPE Wive intake vent brings in fresh outdoor. The intake vent can be painted or wallpapered. The product fits buildings with passive ventilation. The intake vent can be installed on a wall or retrofitted to replace an old vent. Includes three through-the-wall extension pipes, maximum length 440 mm.
Dimensions: Intake vent 100 x 100 mm. Multifunction grille 150 x 150 mm.
Content: Intake vent, filter, thermostat, VILPE Multifunction grille and instruction manuals.

White 1 77 Stock 380000



VILPE® WIVE 100 INTAKE VENT SET

Description: The VILPE Wive intake vent brings in fresh outdoor air. The intake vent can be painted or wallpapered. The product fits buildings with mechanical ventilation. The intake vent can be installed on a wall or retrofitted to replace an old vent. VILPE Multifunction grille is to be installed on the exterior wall. Includes three through-the-wall extension pipes, maximum length 440 mm.
Dimensions: Intake vent 100 x 100 mm. Multifunction grille 150 x 150 mm.
Content: Intake vent, filter, instruction manual, VILPE Multifunction grille.

White 1 77 Stock 380010



VILPE® WIVE 100 INTAKE VENT THERMOSTAT

Description: The VILPE Wive intake vent brings in fresh outdoor. The intake vent can be painted or wallpapered. The product fits buildings with passive ventilation. The intake vent can be installed on a wall or retrofitted to replace an old vent. Includes three through-the-wall extension pipes, maximum length 440 mm.
Dimensions: Intake vent 100 x 100 mm.
Content: Intake vent, filter, thermostat, instruction manual.

White 1 84 Stock 380030



VILPE® WIVE 100 INTAKE VENT

Description: The VILPE Wive intake vent brings in fresh outdoor air. The intake vent can be painted or wallpapered. The product fits buildings with mechanical ventilation. The intake vent can be installed on a wall or retrofitted to replace an old vent. VILPE Multifunction grille is to be installed on the exterior wall. Includes three through-the-wall extension pipes, maximum length 440 mm.
Dimensions: Intake vent 100 x 100 mm.
Content: Intake vent, filter, instruction manual.

White 1 84 Stock 380040



VILPE® WIVE 100 INTAKE VENT FOR VENTILATION WINDOW +THERM.

Description: The VILPE Wive intake vent brings in fresh outdoor air. The intake vent can be painted or wallpapered. The product fits buildings with mechanical ventilation. This product is installed on a window vent with minimum thickness of 40 mm and maximum 90 mm. The intake vent's cover is insulated to prevent condensation.
Dimensions: Intake vent 100 x 100 mm.
Content: Intake vent, thermostat, instruction manuals.

White 1 245 Stock 380070



VILPE® WIVE 100 INTAKE VENT FOR VENTILATION WINDOW

Description: The VILPE Wive intake vent brings in fresh outdoor air. The intake vent can be painted or wallpapered. The product fits buildings with mechanical ventilation. This product is installed on a window vent with minimum thickness of 40 mm and maximum 90 mm. The intake vent's cover is insulated to prevent condensation.
Dimensions: Intake vent 100 x 100 mm.
Content: Intake vent, instruction manuals.

White 1 245 Stock 380080



Wive Intake vents

Colour Pcs/pack Pcs/pallet Delivery Product No.

VILPE® WIVE 100 INTAKE VENT FILTERS (5 pc.)

Description: Filters for the VILPE Wive intake vent. Effectively removes outdoor air pollutants. Filter classification M5.
Contents: Filter (5 pc.).

33 132 Stock 380022



VILPE® WIVE 100 COARSE FILTER (5 pc.)

Description: Filter for use with VILPE Wive vent for window vent.
Contents: Coarse filter (5 pc.).

50 450 Stock 380025



VILPE® WIVE 100 INTAKE VENT SILENCER (1 pc.)

Description: Silencer for the VILPE Wive intake vent. Dampens outdoor noise which might otherwise enter the room through the intake vent.
Dimensions: Ø 90 mm.
Contents: Silencer.

1 1400* Stock 380023



VILPE® WIVE 100 EXTENSION PIPE

Description: Extension pipe for the VILPE Wive intake vent. Effectively filters the air from outdoor air pollutants.
Dimensions: Ø 100 mm x 160 mm.
Content: Extension pipe.

58 464 Stock 380060



VILPE® WIVE 100 FITTING PLATE 200X200

Description: Fitting plate for cases when the diameter of the hole left from the previous intake vent is too large for VILPE Wive. The fitting plate covers the hole allowing the installation of VILPE Wive.
Dimensions: 200 x 200 mm.
Content: Fitting plate.

58 Stock 380026



VILPE® STORMCOVER

The VILPE Storm Cover is designed for use in exposed areas in which heavy winds and storms are common. The storm cover is mounted onto a VILPE Multifunction Grille 150x150, and protects the ventilation duct and interior of the building from rainwater and snow which might otherwise be blown inside. The Storm Cover also reduces external noise, as it covers the front of the Multifunction Grille beneath it.

Dimensions: 158x167x75 mm

Contents: Storm Cover, screws, instruction manual

Black	10	240	Stock	794002
White	10	240	Stock	794000
Light grey	10	240	Stock	794001
Grey	10	240	Stock	794007
Anthracite	10	240	Stock	79400G
White (bulk)	135	540	Stock	794010
Beige (bulk)	135	540	Stock	794013
Grey (bulk)	135	540	Stock	794017
Red (bulk)	135	540	Stock	794018
Anthracite (bulk)	135	540	Stock	79400G



VILPE® INTAKE VENT - SUPPLY AIR INTAKE

The VILPE® Intake Vent supply air element is a rooftop supply air component for ventilation systems. It is compatible with Ø 160 mm ventilation ducts.

The element includes a new and unique VILPE® supply air hood. The hood directs away rain, and the details in the design ensure minimal pressure loss.

The new modern design perfectly matches the classic VILPE® exhaust pipe providing an elegant look on the roof.

The VILPE® Intake Vent supply air element should be installed using VILPE® pass-throughs.



Colour Pcs/pack Pcs/pallet Delivery Product No.

VILPE® 160P/IS/500 INTAKE VENT

Description: Intake vent for buildings with a mechanical ventilation system, to be installed on the roof. Includes VILPE Intake Cowl with a unique structure which separates rain droplets from the outside air. The attention to detail in the design ensures minimal pressure loss. A separate pass-through should be selected according to the roofing material.

Dimensions: Duct size Ø 160 mm, external Ø 225 mm, height above roof approx. 500 mm.

Contents: Ventilation pipe, intake cowl, screws.

Black	1	24*	Stock	741882
Grey	1	24*	Stock	741887
Red	1	12	Order	741888
Brick Red	1	12	Stock	741889
Light Grey	1	12	Order	741881
Anthracite	1	24*	Stock	74188G



VILPE® 160S INTAKE VENT

Description: Intake vent for buildings with a mechanical ventilation system, to be installed on the roof. Includes VILPE Intake Cowl with a unique structure which separates rain droplets from the outside air. The attention to detail in the design ensures minimal pressure loss.



Dimensions: Duct size Ø 160 mm, external Ø 300 mm; installation set 300 x 300 mm, installation area must be at least the same size.

Contents: Ventilation pipe, intake cowl, installation set, screws.

Black	1	18	Stock	741892
Grey	1	18	Order	741897
Red	1	36*	Order	741898
Brick Red	1	18	Order	741899
Light Grey	1	18	Order	741891




Device: VILPE Air intake unit (Ø 160 mm duct)
Performance of the device
Aerodynamic and flow noise properties
EN 12238:2001
ISO 5135:1997
Air density: 1.20 kg/m³

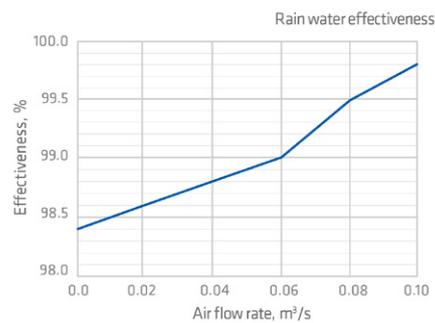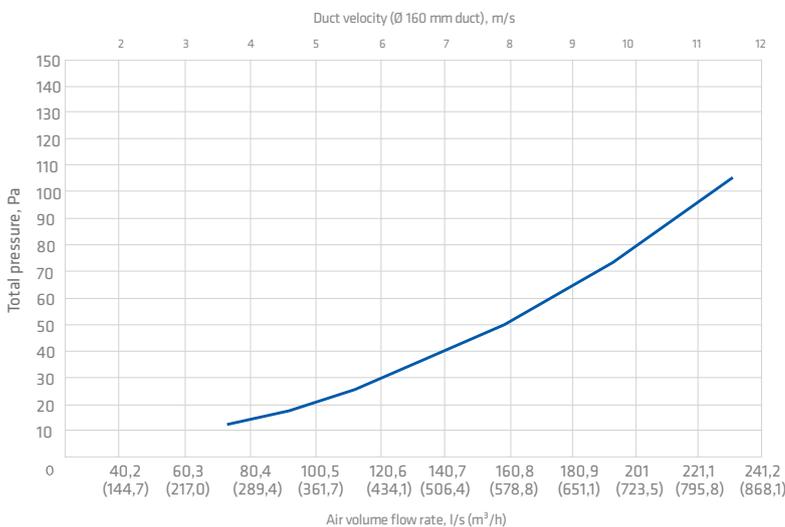

Air flow rate		Performance	
q _v	v	E	Class
0.00	0.00	98.4	B
0.02	1.00	98.6	B
0.04	2.00	98.8	B
0.06	3.00	99.0	A
0.08	4.00	99.5	A
0.10	5.00	99.8	A

Symbols and units

q_v Air flow rate, m³/s
v Core velocity, m/s
E Effectiveness, %

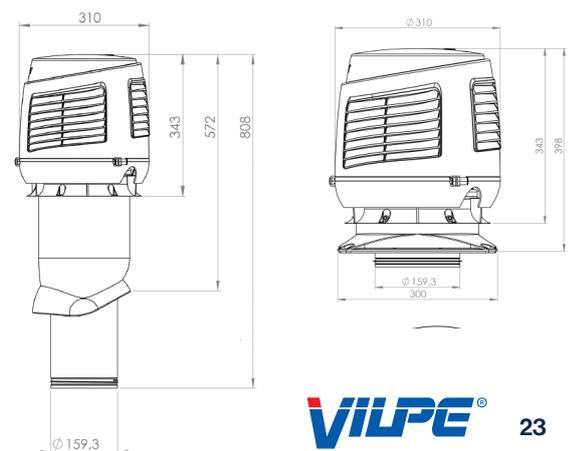

Multifunction grilles

The Multifunction grille works as a ventilation grille for variety of spaces.

The product can also be used as an intake or exhaust vent for mechanical ventilation, in which case a duct fitting plate is required. The duct fitting plate is then joined to the intake/exhaust vent.

An insect net may be deployed to prevent insects and debris from entering through the grille when it is used in a natural ventilation system.




	Colour	Pcs/pack	Pcs/pallet	Delivery	Product No.	
VILPE® MULTIFUNCTION GRILLE 150 X 150	White	1	480	Stock	793320	
Description: When used in mechanical ventilation, a duct fitting plate Ø 60 or 100 mm is required. Dimensions: 150 x 150 mm. Contents: Multifunction grille, 6 mm plugs and screws.	Beige	1	480	Stock	793321	
	Black	1	480	Stock	793322	
	Light Grey	1	480	Stock	793323	
	Grey	1	480	Stock	793327	
	Red	1	480	Stock	793328	
VILPE® MULTIFUNCTION GRILLE 240 X 240	White	1	180	Stock	793330	
Description: When used in mechanical ventilation, a duct fitting plate Ø 125, 160 or 200 mm is required. Dimensions: 240 x 240 mm. Contents: Multifunction grille, 6 mm plugs and screws.	Beige	1	180	Stock	793331	
	Black	1	180	Stock	793332	
	Light Grey	1	180	Stock	793333	
	Grey	1	180	Stock	793337	
	Red	1	180	Stock	793338	
VILPE® MULTIFUNCTION GRILLE 375 X 375	White	1	60	Stock	793340	
Description: When used in mechanical ventilation, a duct fitting plate Ø 200, 250 or 315 mm is required. Dimensions: 375 x 375 mm. Contents: Multifunction grille, 6 mm plugs and screws.	Beige	1	64	Order	793341	
	Light Grey	1	64	Stock	793343	
	Grey	1	64	Stock	793347	
	Red	1	60	Stock	793348	
VILPE® DUCT FITTING PLATE 60 MM (for 150 x 150 grille)		1	720	Stock	793352	
VILPE® DUCT FITTING PLATE 125 MM (for 150 x 150 grille)		1	480	Stock	793353	
VILPE® DUCT FITTING PLATE 125 MM (for 240 x 240 grille)		1	180	Stock	793354	
VILPE® DUCT FITTING PLATE 160 MM (for 240 x 240 grille)		1	180	Stock	793355	
VILPE® DUCT FITTING PLATE 200 MM (for 240 x 240 grille)		1	180	Stock	793359	
VILPE® DUCT FITTING PLATE 200 MM (for 375 x 375 grille)		1	120	Stock	793356	
VILPE® DUCT FITTING PLATE 250 MM (for 375 x 375 grille)		1	112	Stock	793357	
VILPE® DUCT FITTING PLATE 310 MM (for 375 x 375 grille)		1	112	Stock	793358	
VILPE® INSECT NET 150 X 150 (for 150 x 150 grille)		1	200	Stock	793362	
VILPE® INSECT NET 240 X 240 (for 240 x 240 grille)		1	100	Stock	793364	


Multifunction grilles

Technical data

Multifunction grilles	Duct fitting plate
150 x 150 mm	Ø 60
	Ø 100
	Ø 125
240 x 240 mm	Ø 160
	Ø 200 II
	Ø 250
375 x 375 mm	Ø 200 I
	Ø 250
	Ø 315

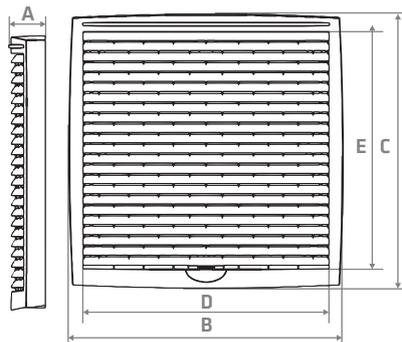


mm	A	B	C	D	E
150 x 150	20	150	-	-	-
240 x 240	30	240	241	215	209
375 x 375	47	374	377	326	327

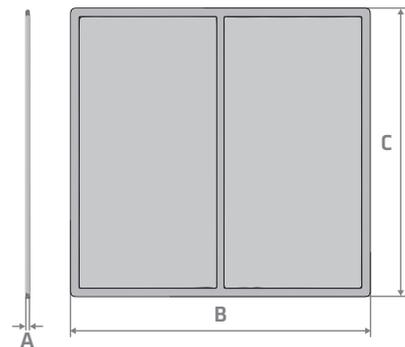

mm	A	B	C
150 x 150	3	112	117
240 x 240	3	201	195

	Reference colour
	Light grey RAL 7038
	Grey RAL 7015
	Red RAL 3009
	White RAL 9016
	Beige RAL 1001


Due to printing technical reasons, actual product colours may differ from those shown in the Catalogue.

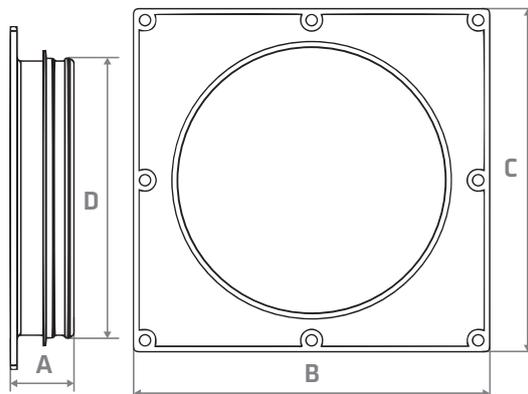


mm	A	B	C	D
793352	32	112	117	60
793353	32	-	-	99
793354	36	201	195	124
793355	36	201	195	159
793356	32	-	-	200
793357	32	-	-	249
793358	30	-	-	314
793359	-	-	-	-

Airflow of Multifunction grille

VILPE® Multifunction grille inward airflow

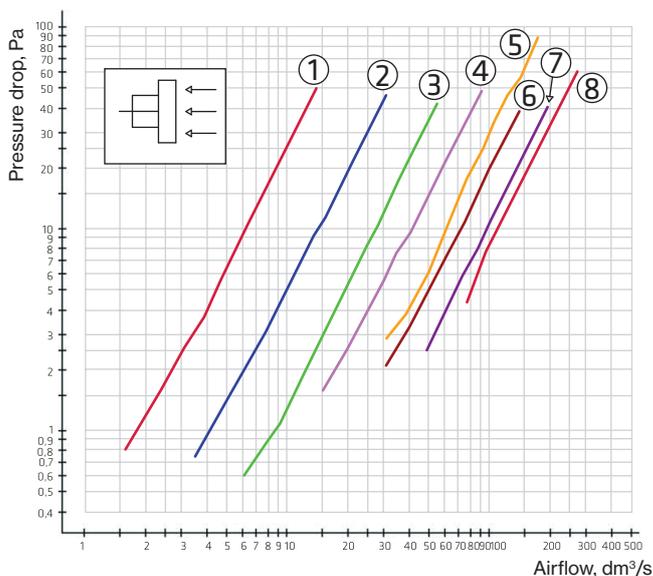

VILPE® Multifunction grille outward airflow

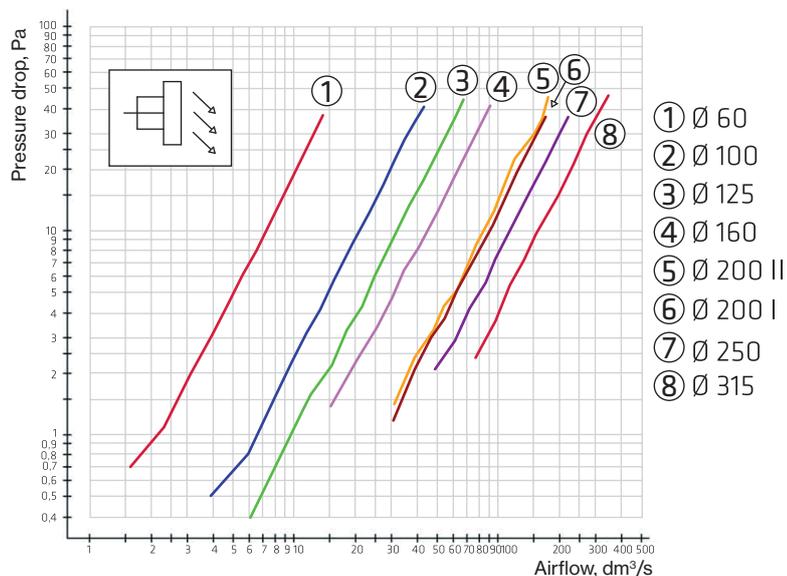

- ① Ø 60
- ② Ø 100
- ③ Ø 125
- ④ Ø 160
- ⑤ Ø 200 I
- ⑥ Ø 200 II
- ⑦ Ø 250
- ⑧ Ø 315

In mechanical ventilation system direction of air flow from inside to outside, without insect net. In the grille the exhaust air is directed diagonally downwards.

IO wall element

Colour Pcs/pack Pcs/pallet Delivery Product No.

VILPE® IO 125 -WALL ELEMENT

Usage: Exterior wall-mounted product with a contraction part, enabling the same product to be used for different apartment sizes. The handedness of VILPE® IO's air impeller can be adapted to both left- and right-sided air intakes and exhaust air blow-outs.

Dimensions: Ø 125 mm.

Contents: Wall-mounted gear, contraction part, installation instructions.

White	1	24	Stock	370000
Black	1	24	Stock	370002
Grey	1	24	Stock	370007
Red	1	24	Stock	370008



VILPE® IO 160 -WALL ELEMENT

Usage: Exterior wall-mounted product with a contraction part, enabling the same product to be used for different apartment sizes. The handedness of VILPE® IO's air impeller can be adapted to both left- and right-sided air intakes and exhaust air blow-outs.

Dimensions: Ø 160 mm.

Contents: Wall-mounted gear, contraction part, installation instructions.

White	1	24	Stock	370100
Black	1	24	Stock	370102
Grey	1	24	Stock	370107
Red	1	24	Stock	370108



VILPE® IO 200 -WALL ELEMENT

Usage: Exterior wall-mounted product with a contraction part, enabling the same product to be used for different apartment sizes. The handedness of VILPE® IO's air impeller can be adapted to both left- and right-sided air intakes and exhaust air blow-outs.

Dimensions: Ø 200 mm.

Contents: Wall-mounted gear, contraction part, installation instructions.

White	1	12	Stock	370200
Black	1	12	Stock	370202
Grey	1	12	Stock	370207
Red	1	12	Order	370208



VILPE® IO 250 -WALL ELEMENT

Usage: Exterior wall-mounted product with a contraction part, enabling the same product to be used for different apartment sizes. The handedness of VILPE® IO's air impeller can be adapted to both left- and right-sided air intakes and exhaust air blow-outs.

Dimensions: Ø 250 mm.

Contents: Wall-mounted gear, contraction part, installation instructions.

White	1	12	Stock	370300
Black	1	12	Stock	370302
Grey	1	12	Stock	370307
Red	1	12	Order	370308



VILPE® IO 125/160 INTAKE WALL ELEMENT

Description: Exterior wall-mounted product which directs intake air through the exterior wall, either into a ventilation unit or as an air inlet for basement spaces. Thanks to the ambidextrous design of the product, the same unit can be adapted to both left- and right-sided air intake configurations.

Dimensions: Duct size Ø 125/160 mm.

Contents: VILPE IO intake air element, screws and screw plugs, installation instructions.

White	1	24	Order	370120
Black	1	24	Order	370122
Grey	1	24	Order	370127
Red	1	24	Order	370128



VILPE® IO 200/250 INTAKE WALL ELEMENT

Description: Exterior wall-mounted product which directs intake air through the exterior wall, either into a ventilation unit or as an air inlet for basement spaces. Thanks to the ambidextrous design of the product, the same unit can be adapted to both left- and right-sided air intake configurations.

Dimensions: Duct size Ø 200/250 mm.

Contents: VILPE IO intake air element, screws and screw plugs, installation instructions.

White	1	12	Order	370130
Black	1	12	Order	370132
Grey	1	12	Order	370137
Red	1	12	Order	370138




When to use the reduction piece







The exhaust airflow needed to reach 5 m/s outflow velocity is listed below.

VILPE® product	Exhaust airflow l/s (m³/h)	No reduction piece needed
IO 125	18-27 (65-97)	>27 (>97)
IO 160	30-44 (108-158)	>44 (>158)
IO 200	48-70 (173-251)	>70 (>251)
IO 250	72-106 (261-381)	>106 (>381)

Air ventilation

An example of a ventilation system in an apartment with VILPE® IO wall element.

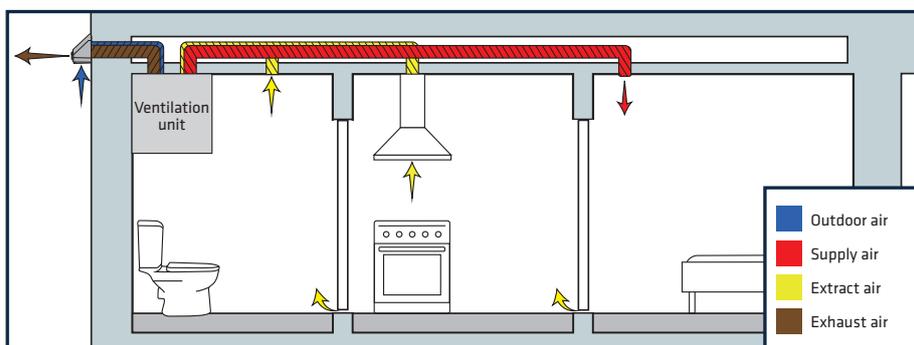

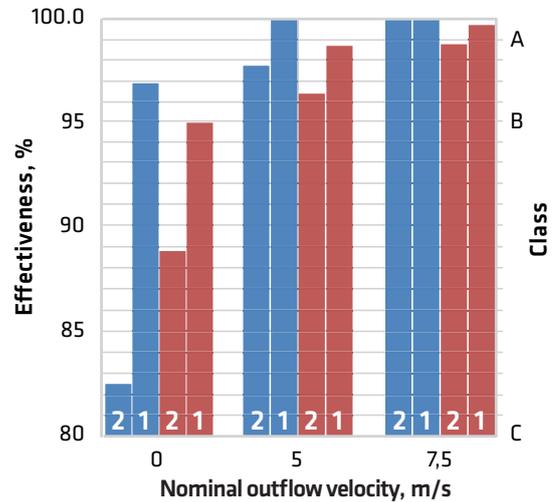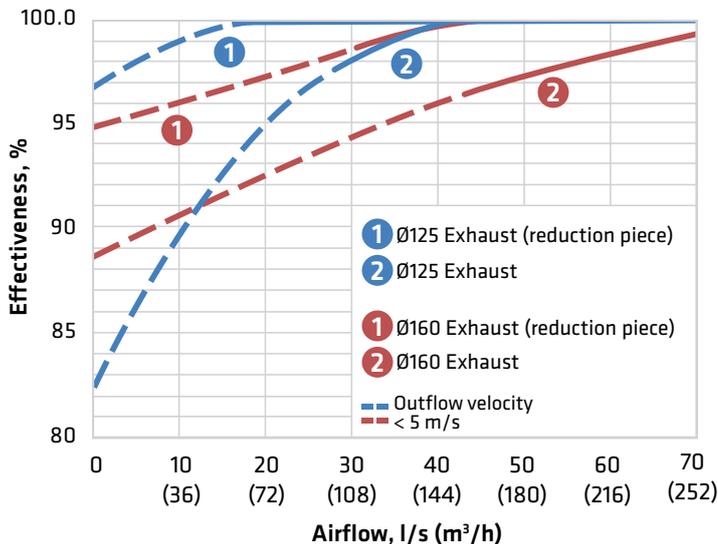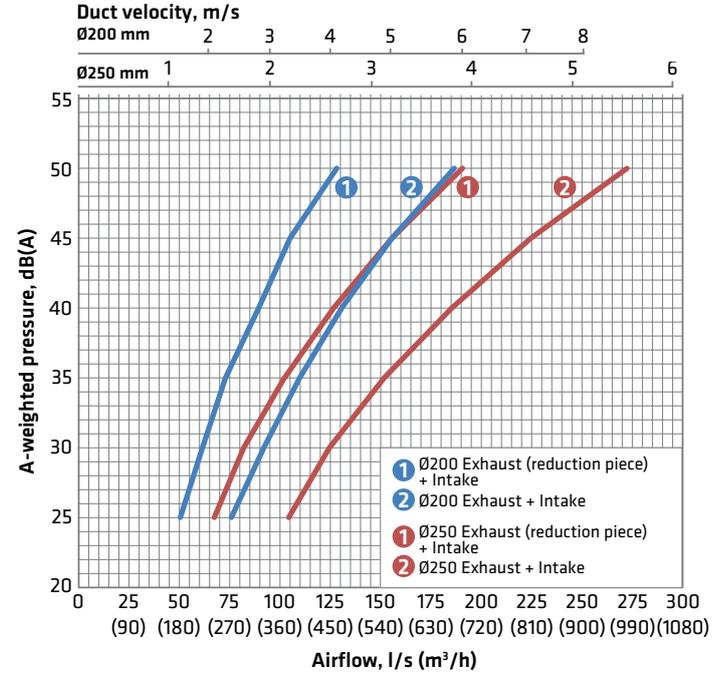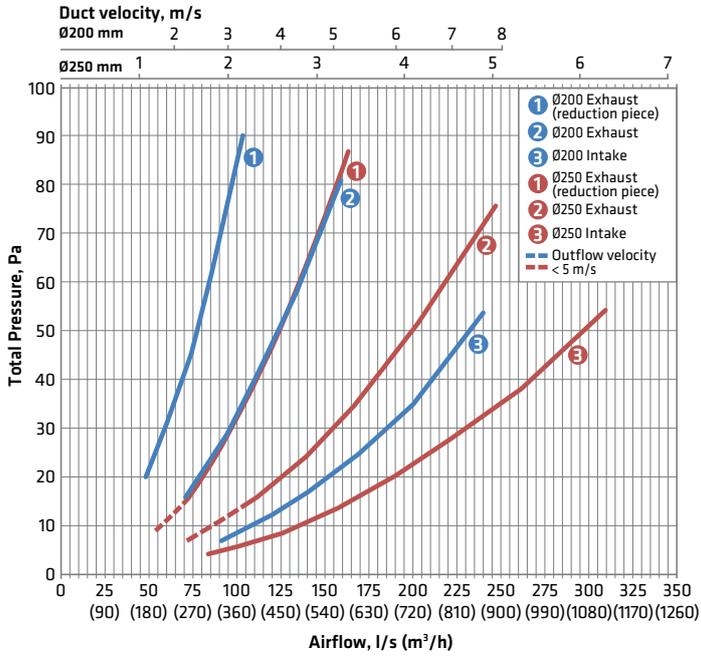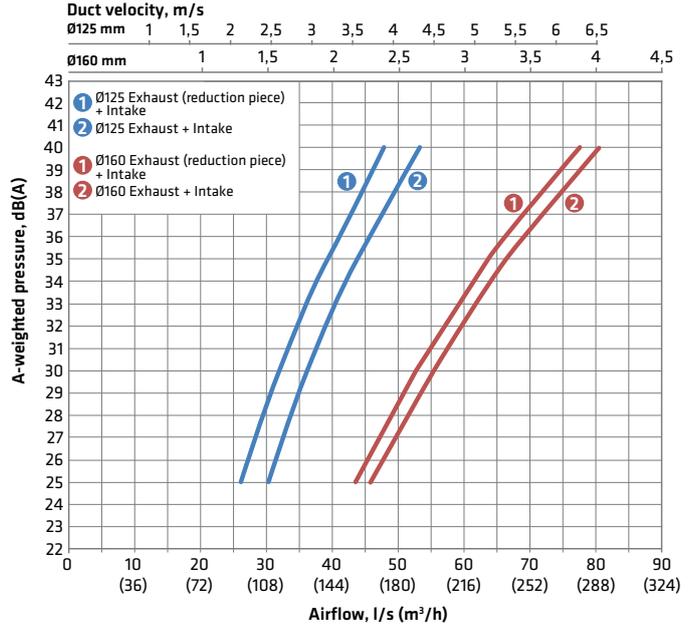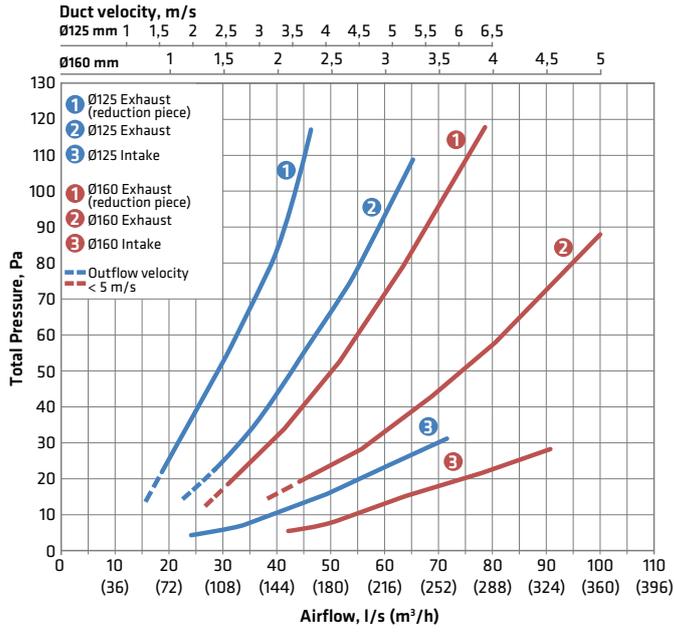



P-series pass-throughs: 75 – 160 mm

Colour Pcs/pack Pcs/pallet Delivery Product No.

VILPE® TILE 2K PASS-THROUGH

Description: The most common concrete tile roofing types. Replaces one 2-wave concrete tile up to width 330 mm and wave height 27–40 mm.

Contents: Pass-through, underlay 2K seal, screws, installation instructions/template for the underlay seal and the passthrough.

Black	1	36*	Stock	300002
Grey	1	36*	Stock	300007
Red	1	36*	Stock	300008
Brick Red	1	36*	Stock	300009
Light Grey	1	18	Order	300001



VILPE® UNITILE 2K PASS-THROUGH

Description: All tile roofings (ceramic, clay, concrete and special tiles, 1- and 2-wave tiles and plain tiles).

Contents: Pass-through, underlay 2K seal, upper edge seal set, bottom bracket, screws, installation instructions/template for the underlay seal and the pass-through.

Black	1	24	Stock	300062
Grey	1	24	Stock	300067
Red	1	24	Stock	300068
Brick Red	1	24	Stock	300069



VILPE® EVO 2K PASS-THROUGH

Description: Monier/Braas Teviva/Braas Tegalit plain tiles with length 420 mm, width 330 mm.

Contents: Pass-through, underlay 2K seal, screws, installation instructions/template for the underlay seal and the pass-through.

Black	1	24	Stock	300072
Grey	1	24	Stock	300077
Red	1	24	Order	300078
Brick Red	1	24	Order	300079
Anthracite	1	24	Order	30007G



VILPE® Vittinge 2K Pass-Through

Description: Vittinge clay tile roofing.

Contents: Pass-through, underlay 2K seal, screws, installation instructions/templates for the underlay seal and the pass-through.

1-WAVED E13	Brick Red	1	18	Order	300029
2-WAVED T11	Brick Red	1	18	Order	300059



VILPE® CLASSIC VINO 2K PASS-THROUGH

Description: Plain standing seam roofing or if retrofitted, also felt roofing. Thick rubber seal on the bottom of the flange. Sealing compound (not incl.) required on felt roofing. Minimum roof pitch 1:5 (11,5°).

Contents: Pass-through, underlay 2K seal, screws, installation instructions/templates for the underlay seal and the pass-through.

Black	1	48*	Stock	746002
Grey	1	48*	Stock	746007
Red	1	48*	Stock	746008
Brick Red	1	48*	Stock	746009
Light Grey	1	48*	Stock	746001



VILPE® PROFILED STEEL 2K PASS-THROUGH

Description: All round profiled metal sheet roofing types (tilepat-terned). Minimum length of tile pattern 350 mm. Mouldable and fully waterproof thanks to the rubber seal on the bottom surface.

Contents: Pass-through, underlay 2K seal, sealing compound, screws, installation instructions/templates for the underlay seal and the pass-through.

Black	1	48	Stock	300032
Brown	1	48	Stock	300034
Green	1	24	Order	300036
Grey	1	48	Stock	300037
Red	1	48	Stock	300038
Brick Red	1	24	Stock	300039



VILPE® AALTO 2K PASS-THROUGH

Description: Ruukki's Adamante or similar metal sheet roofing.

Contents: Pass-through, underlay 2K seal, sealing compound, screws, installation instructions/templates for the underlay seal and the pass-through.

Black	1	24	Stock	740742
Grey	1	24	Stock	740747
Red	1	24	Order	740748
Brick Red	1	24	Order	740749
Anthracite	1	24	Order	74074G



P-series pass-throughs: 75 – 160 mm



	Colour	Pcs/pack	Pcs/pallet	Delivery	Product No.		
VILPE® TILE PASS-THROUGH							
Description: The most common concrete tile roofing types. Replaces one 2-wave concrete tile with width of 330 mm and wave height of 27–40 mm. Contents: Pass-through, underlay ring, screws, installation instructions.	Black	1	48*	Stock	74011	 	
	Grey	1	48*	Stock	74017		
	Red	1	24	Stock	74015		
	Brick Red	1	48*	Stock	74021		
	Light Grey	1	24	Order	74012		
	Anthracite	1	24	Order	7401G		
VILPE® UNITILE PASS-THROUGH							
Description: All tile roofings (ceramic, clay, concrete and special tiles, 1- and 2-wave tiles and plain tiles). Contents: Pass-through, underlayring, upper edge seal set, bottom bracket, screws, installation instructions/template for the underlay seal and the pass-through.	Black	1	24*	Stock	740902	 	
	Grey	1	24*	Stock	740907		
	Red	1	12	Stock	740908		
	Brick Red	1	24*	Stock	740909		
	Anthracite	1	12	Stock	74090G		
	VILPE® VITTINGE PASS-THROUGH						
Description: Vittinge clay tile roofing. Contents: Pass-through, underlay ring, screws, installation instructions.	1-WAVED E13	Brick Red	1	24	Stock	74009	 
	2-WAVED T11	Brick Red	1	48*	Stock	74010	
VILPE® EVO PASS-THROUGH							
Description: Monier/Braas Teviva/Braas Tegalit plain tiles with length 420 mm, width 330 mm. Contents: Pass-through, underlay ring, screws, installation instructions/template for the underlay ring and the pass-through.	Black	1	24	Stock	740812	 	
	Grey	1	24	Stock	740817		
	Red	1	24	Order	740818		
	Brick Red	1	24	Order	740819		
	Anthracite	1	24	Stock	74081G		
VILPE® CLASSIC VINO PASS-THROUGH							
Description: Plain standing seam roofing or if retrofitted, also felt roofing. Thick rubber seal on the bottom of the flange. Sealing compound (not incl.) required on felt roofing. Replaces VILPE® Classic pass-through. Minimum roof pitch 1:5 (11,5°). Contents: Pass-through, underlayring, screws, installation instructions/templates for the underlay seal and the pass-through.	Black	1	48	Stock	746022	 	
	Grey	1	48	Stock	746027		
	Red	1	48	Stock	746028		
	Brick Red	1	48	Stock	746029		
	Light Grey	1	48	Stock	746021		
	Anthracite	1	24	Stock	74602G		
VILPE® STEEL PASS-THROUGH							
Description: Low profiled metal sheet roofing. Waterproof thanks to the rubber cone with the mouldable aluminium flange. Contents: Pass-through, underlay ring, sealing ring, sealing compound, screws, template/installation instructions.	Black	1	36*	Stock	73552	 	
	Grey	1	36*	Stock	73557		
	Red	1	36*	Stock	73556		
	Brick Red	1	36*	Stock	73559		
	Light Grey	1	18	Stock	73551		
	Anthracite	1	18	Stock	7355G		
VILPE® PROFILED STEEL PASS-THROUGH							
Description: All round profiled metal sheet roofing types (tilepatterned). Minimum length of tile pattern 350 mm. Mouldable and fully waterproof thanks to the rubber seal on the bottom surface. Contents: Pass-through, underlay ring, sealing compound, screws, installation instructions/template.	Black	1	72	Stock	75172	 	
	Grey	1	72	Stock	75177		
	Red	1	84	Stock	75178		
	Brick Red	1	72	Stock	75179		
	Anthracite	1	36	Stock	7517G		
VILPE® HYYGGE PASS-THROUGH							
Description: Ruukki´s Hyygge or similar metal sheet roofing. Contents: Pass-through, underlay ring, sealing compound, screws, installation instructions/templates for the underlay seal and the pass-through.	Black	1	36	Stock	740822	 	
	Grey	1	36	Stock	740827		
	Anthracite	1	36	Stock	74082G		
VILPE® AALTO PASS-THROUGH							
Description: Ruukki´s Adamante or similar metal sheet roofing. Contents: Pass-through, underlay ring, sealing compound, screws, installation instructions/templates for the underlay seal and the pass-through.	Black	1	36	Stock	740802	 	
	Grey	1	36	Stock	740807		
	Red	1	36	Order	740808		
	Brick Red	1	36	Order	740809		
	Anthracite	1	36	Order	74080G		



P-series pass-throughs: 75 – 160 mm

Colour Pcs/pack Pcs/pallet Delivery Product No.

VILPE® NERA PASS-THROUGH

Description: Ruukki's Finnera or Finnera Plus or similar roofing. Formerly called VILPE® SPT 60 pass-through or Finnera Plus.

Contents: Pass-through, underlay ring, sealing compound, screws, template.

Colour	Pcs/pack	Pcs/pallet	Delivery	Product No.
Black	1	48*	Stock	740762
Grey	1	48*	Stock	740767
Red	1	24	Stock	740768
Brick Red	1	24	Stock	740769
Anthracite	1	24	Stock	74076G



VILPE® DECRA PASS-THROUGH

Description: Decra roofing.

Contents: Pass-through, underlay ring, sealing compound, screws, template.

Colour	Pcs/pack	Pcs/pallet	Delivery	Product No.
Black	1	24	Stock	732612
Grey	1	24	Order	732617
Red	1	24	Order	732618
Brick Red	1	24	Stock	732619



VILPE® HS SLATE PASS-THROUGH

Description: Slate, shingle and felt roofing types. Replaces VILPE® Felt pass-through. Minimum roof pitch 1:5 (11,5°).

Contents: Pass-through, screws, installation instructions.

Colour	Pcs/pack	Pcs/pallet	Delivery	Product No.
Black	1	40*	Stock	741062
Grey	1	40*	Stock	741067
Red	1	20	Stock	741068
Brick Red	1	40*	Stock	741069



VILPE® FELT PASS-THROUGH

Description: The felt pass through is installed between two felt layers. Also suitable for slate roof. Flange width 150 mm, width of the whole pass-through 488 mm, length 583 mm. Minimum roof pitch 1:5 (11,5°).

Colour	Pcs/pack	Pcs/pallet	Delivery	Product No.
Black	15	120	Stock	74002
Grey	15	120	Stock	740037



VILPE® FELT TALL PASS-THROUGH

Description: Felt roofing types while roof pitch less than 1:5 (11.5 degrees).

Dimensions: Stem height 200 mm.

Contents: Pass-through.

Colour	Pcs/pack	Pcs/pallet	Delivery	Product No.
Black	14	112	Stock	740752
Grey	14	112	Stock	740757




VILPE® COLLAR PVC for FELT TALL PASS-THROUGH

Description: For easy installation of Felt Tall pass-through on PVC roofing.

Contents: Collar made of PVC material.

Colour	Pcs/pack	Pcs/pallet	Delivery	Product No.
Grey	10	400*	Stock	75703
Light Grey	10	400*	Stock	75702



VILPE® COLLAR EPDM for FELT TALL PASS-THROUGH

Description: For easy installation of Felt Tall pass-through on EPDM roofing.

Contents: Collar made of EPDM material.

	10	120	Stock	75700
--	----	-----	-------	-------



VILPE® ETERNIT B9 PASS-THROUGH

Description: Fibre-cement roofing with tile width and wave height of 177 mm and 57 mm.

Contents: Pass-through.

Black		50	Stock	74007
Grey		50	Stock	740077



P-series pass-throughs: 75 – 160 mm



	Colour	Pcs/pack	Pcs/pallet	Delivery	Product No.
--	--------	----------	------------	----------	-------------

VILPE® UNDERLAY RING

Description: Fastening of underlay material to roof battens, in set with VILPE® pass-through. Keeps water out of structures and insulation. More advanced solution: VILPE® Underlay 2K Seal.

Contents: Underlay ring.

Black	50	200	Stock	73202
-------	----	-----	-------	-------



VILPE® UNDERLAY 2K SEAL

Description: Fastened to the roof battens and extended to the upper edge of the pass-through, ensures complete water-tightness of the gap between the underlay and the roofing material.

Contents: Underlay 2K seal, screws, installation instructions/templates for the underlay seal.

Black	1	24	Stock	73212
-------	---	----	-------	-------



P-series pass-throughs: 160 – 250 mm

	Colour	Pcs/pack	Pcs/pallet	Delivery	Product No.
--	--------	----------	------------	----------	-------------

VILPE® XL TILE PASS-THROUGH

Description: The most common concrete tile roofing types. Replaces two 2-wave concrete tiles up to width of 330 mm and wave height of 27–40 mm.

Contents: Pass-through, XL sealing ring, screws.

Black	1	6	Stock	740102
Grey	1	6	Stock	740107
Red	1	6	Stock	740108
Brick Red	1	6	Stock	740109



VILPE® XL UNIVERSAL PASS-THROUGH

Description: All profiled steel and tile roofing types. Cut on site to fit the roofing profile.

Contents: Pass-through, two-piece XL underlay ring, screws, installation instructions.

Black	1	8*	Stock	735502
Grey	1	8*	Stock	735507
Red	1	4	Stock	735508
Brick Red	1	8*	Stock	735509



VILPE® XL UNIVERSAL MK1 PASS-THROUGH

Description: Profiled steel roofing with tile pattern that has wave distance of 183.3 mm, wave length of 350 mm and wave height of 39 mm.

Contents: Pass-through, XL underlay ring, screws, installation instructions.

Black	1	8*	Stock	735512
Grey	1	8*	Stock	735517
Red	1	8*	Stock	735518



VILPE® XL CLASSIC PASS-THROUGH

Description: Plain standing seam roofing or if retrofitted, also felt roofing. Thick rubber seal under the flange. Minimum roof pitch 1:5 (11,5°).

Contents: Pass-through, two-piece XL underlay ring, template, sealing compound, screws.

Black	1	24*	Stock	732542
Grey	1	24*	Stock	732547
Red	1	12	Stock	732548
Brick Red	1	12	Stock	732549
Light Grey	1	24*	Order	732541
Anthracite	1	12	Order	73254G



VILPE® XL FELT PASS-THROUGH

Description: Felt roofing. Installed between two felt layers. Minimum roof pitch 1:5 (11,5°).

Dimensions: Flange width 150 mm.

Contents: Pass-through.

Black	5	40	Stock	740042
Grey	5	20	Stock	740047
Red	5	20	Order	740048
Brick Red	5	20	Order	740049



VILPE® XL FELT TALL PASS-THROUGH

Description: Felt roofing with roof pitch less than 1:5 (11.5 degrees).

Dimensions: Stem height 300 mm.

Contents: Pass-through.

Black		50*	Stock	740052
Grey		50*	Stock	740057





P-series pass-throughs: 160 – 250 mm

Colour Pcs/pack Pcs/pallet Delivery Product No.

VILPE® XL UNDERLAY RING

Description: Fastening of underlay material to roof battens, in set with VILPE® XL pass-throughs. Keeps water out of structures and insulation.

Contents: Two-piece XL Underlay ring.

Black 1 100 Stock 73204



VILPE® - maximal roof pitches for P-series pass-throughs

Pass-through	Pipe XL Pass-through	Ø 110 mm	Ø 125 mm	Ø 160 mm	Ø 160 mm XL	Ø 200 mm XL	Ø 250 mm XL
Tile 2K / Tiili	XL Tile	40° / 48°	37° / 48°	32° / 37°	47°	45°	43°
Unitile 2K / Unitile	-	48° / 57°	46° / 57°	43° / 52°	-	-	-
Vittinge 1-w	-	45°	40°	30°	-	-	-
Vittinge 2-w	-	55°	50°	35°	-	-	-
Profiled steel 2K / Profiled steel	XL Universal MK1	43° / 50°	40° / 45°	36° / 40°	47°	47°	47°
Steel	XL Universal	45°	40°	27°	47°	47°	47°
Classic	XL Classic	55°	55°	48°	47°	47°	47°
Classic Vino 2K	-	48°	46°	43°	-	-	-
HS Slate	-	59°	57°	52°	-	-	-
Felt	XL Felt	50°	50°	45°	47°	48°	45°
Felt Tall	XL Felt Tall	*	*	*	*	*	*
Decra	-	45°	45°	45°	-	-	-
Eternit B9	-	45°	45°	45°	-	-	-
Nera	-	57°	57°	50°	-	-	-
Evo 2K	-	39°	38°	30°	-	-	-
Aalto 2K	-	55°	50°	45°	-	-	-

P-series pass-throughs are for roofs with pitches of more than 1:5 (11.5°), unless stated otherwise.

On maximal roof pitches make sure that the roof structure does not prevent the installation.

* The Felt pass-through tall is designed for installation on roofs with a pitch of less than 1:5 (11.5°). For the steeper roofs the normal Felt pass-through suits better.

Note! The roof pitches in the table are suggestive values. In extreme situations, the height of the roofing profile or the installation point of the underlay seals affects the values.

Aerial sleeves and pipe pass-throughs

Colour Pcs/pack Pcs/pallet Delivery Product No.

VILPE® AERIAL SLEEVE 12-100 MM

Description: For leading antennas, flagpoles and other pipes and bollards through the roof. Stepped EPDM rubber + plastic collar, installed on a separately available VILPE® pass-through. The pass-through is chosen according to the roofing material.

Dimensions: For duct sizes Ø 12/19/25/38/50/60/75/90/100 mm.

Contents: Aerial sleeve, clamp.

Black 20 80 Stock 74092
 Grey 20 80 Stock 74097
 Red 20 80 Stock 74098
 Brick Red 20 80 Stock 74099



VILPE® PIPE SEALING 110-155

Description: For leading antennas, flagpoles and other pipes and bollards through the roof. Stepped EPDM rubber + plastic collar, installed on a separately available VILPE® pass-through. The pass-through is chosen according to the roofing material.

Dimensions: For duct sizes Ø 110/125/140/155 mm.

Contents: Pipe sealing, clamp.

Black 1 36 Stock 741002
 Grey 1 36 Stock 741007
 Red 1 36 Order 741008
 Brick Red 1 36 Order 741009



VILPE® XL PIPE SEALING 175-250

Description: For leading antennas, flagpoles and other pipes and bollards through the roof. Stepped EPDM rubber, installed on a separately available VILPE® XL pass-through. The pass-through is chosen according to the roofing material.

Dimensions: For duct sizes Ø 175/200/225/250 mm.

Contents: Pipe sealing, clamp.

1 24 Stock 740896



Ventilation of structures

	Colour	Pcs/pack	Pcs/pallet	Delivery	Product No.	
VILPE® KTV FELT VENTILATION SET/RIDGE Description: Underpressure air vent for ventilating the roof structures or attic space, for felt roofings. Installed on the ridge, on the pane or next to the wall. Contents: Ventilator	Black	24	96	Stock	753122	
	Grey	24	96	Stock	753127	
	Red	24	96	Order	753128	
VILPE® RIDGE TILE AIR VENT Description: Negative pressure air vent for the ventilation of roof structures and attic spaces. Designed for most common concrete tile roofing types. Replaces one ridge tile. Contains a 100 mm pipe, cowl, ridge pass-through adaptor and fixing screws. The cowl prevents rainwater from entering the structures or attic space. Dimensions: Height 300 mm. Contents: Negative pressure air vent, cowl, ridge pass-through adaptor, screws.	Black	1	36*	Stock	733932	
	Grey	1	18	Stock	733937	
	Red	1	18	Stock	733938	
	Brick Red	1	18	Stock	733939	
VILPE® RIDGE CAPPING VENT Description: Underpressure air vent for ventilating the roof structures or attic space. For sheet metal roofing. Installed in round, angular or V-shaped ridge capping. Also retrofittable. Contents: Frame, seals, cover piece with a filter, screws, installation instructions.	Black	10	120	Stock	733912	
	Grey	10	120	Stock	733917	
	Red	10	120	Stock	733918	
	Brick Red	10	120	Stock	733919	
VILPE® AIRIDGE FELT RIDGE VENT Description: Underpressure air vent for ventilating the roof structures of felt roofing. Installed in a chain on the ridge by using SNAP couplings. Dimensions: 580 x 325 x 30 mm. Max. angle 45°. Contents: Ventilator.	Black	12	144	Stock	73090	


Roof hatches

	Colour	Pcs/pack	Pcs/pallet	Delivery	Product No.	
VILPE® UNIROOF ROOF HATCH Description: For both tile and sheet metal roofings. A flexible fold facilitates installation under the ridge element. Used as a fire and service hatch and an access between the roof and the attic space. Dimensions: Opening 600 x 600 mm. Contents: Roof hatch, seal, Uniroof underlay sealing, screws, installation instructions.	Black	1	6*	Stock	738852	
	Grey	1	6*	Stock	738857	
	Red	1	6*	Stock	738858	
	Brick Red	1	6*	Stock	738859	

KTV ventilation sets

	Colour	Pcs/pack	Pcs/pallet	Delivery	Product No.	
VILPE® KTV TILE VENTILATION SET						
<p>Description: Roofing structure and roof space ventilation. Also suitable for drainage ventilation. Replaces one concrete roof tile with tile width of 330 mm, and wave width and height 330 mm and 27-40 mm respectively.</p> <p>Contents: KTV ventilator, underlay ring, screws.</p>	Black	1	24	Order	73412	
	Grey	1	24	Order	73417	
	Red	1	24	Order	73418	
	Brick Red	1	24	Order	73419	
VILPE® KTV UNITILE VENTILATION SET						
<p>Description: Ventilation of roof structures and roof space, drainage ventilation. For all tile roofing types (ceramic, clay, concrete and special tiles, 1- and 2-wave tiles and plain tiles).</p> <p>Contents: KTV ventilator, underlay ring, installation instructions, screws.</p>	Black	1	20	Order	792242	
	Grey	1	20	Order	792247	
	Red	1	20	Order	792248	
	Brick Red	1	20	Order	792249	
VILPE® KTV CLASSIC VENTILATION SET						
<p>Description: Roofing structure and roof space ventilation. Also suitable for drainage ventilation. Plain standing seam or if, retrofitted, also felt roofing. Thick rubber seal on the bottom of the flange. Sealing compound (not incl.) required on felt roofing.</p> <p>Contents: KTV ventilator, underlay ring, screws.</p>	Black	1	84*	Order	732532	
	Grey	1	36	Stock	732537	
	Brick Red	1	36	Order	732539	
VILPE® KTV STEEL VENTILATION SET						
<p>Description: Roofing structure and roof space ventilation. Also suitable for drainage ventilation. Low profiled metal sheet roofing. Waterproof thanks to the rubber cone with the mouldable aluminium flange.</p> <p>Contents: KTV ventilator, underlay ring, sealing ring, sealing compound, screws.</p>	Black	1	36	Order	73332	
	Grey	1	36	Stock	73337	
	Red	1	36	Order	73338	
	Brick Red	1	36	Order	73339	
VILPE® KTV PROFILED STEEL VENTILATION SET						
<p>Description: Ventilation of roof structures and roof space, drainage ventilation. For all round profiled metal sheet roofing types (tile-patterned). Minimum length of tile pattern 350 mm.</p> <p>Contents: KTV ventilation set, underlay ring, sealing compound, screws, installation instructions/template.</p>	Black	1	36	Order	75272	
	Grey	1	36	Order	75277	
	Red	1	84*	Order	75278	
	Brick Red	1	36	Order	75279	
VILPE® KTV FELT VENTILATION SET						
<p>Description: Roofing structure and roof space ventilation. Also suitable for drainage ventilation. Plain standing seam or if, retrofitted, also felt roofing. Slate, shingle and felt roofing types.</p> <p>Contents: KTV ventilator, screws.</p>	Black	1	24	Order	780132	
	Red	1	24	Order	780138	
	Brick Red	1	24	Order	780139	

Alipai underpressure vents

	Colour	Pcs/pack	Pcs/pallet	Delivery	Product No.	
VILPE® ALIPAI FLOW 110 UNDERPRESSURE AIR VENT						
Description: Underpressure ventilation pipe for ventilating roof structures of a low-pitched felt roof. Installed with hot bitumen between two felt layers. Dimensions: Ø 110 mm, height 476 mm. Width of the flange 150 mm. Contents: Underpressure ventilation pipe, FLOW-cowl.	Black	11	88*	Stock	732102	
	Grey	11	88*	Stock	732107	
	Light Grey	11	88*	Stock	732101	
VILPE® ALIPAI FLOW 160 UNDERPRESSURE AIR VENT						
Description: Underpressure ventilation pipe for ventilating roof structures of a low-pitched felt roof. Installed with hot bitumen between two felt layers. Dimensions: Ø 160 mm, height 509 mm. Width of the flange 150 mm. Contents: Underpressure ventilation pipe, FLOW-cowl.	Black	6	48*	Stock	730162	
VILPE® ALIPAI RIDGE FLOW 27						
Description: Underpressure air ridge vent for ventilating roof structures of a felt roof with pitch of 27 degrees. Dimensions: Height 477/396 mm. Contents: Underpressure air vent, FLOW-cowl.	Black (Ø110/477)	9	72*	Stock	732142	
	Black (Ø160/396)	4	32*	Stock	730182	
VILPE® ALIPAI RIDGE FLOW 14						
Description: Underpressure air ridge vent for ventilating roof structures of a felt roof with pitch of 14 degrees. Dimensions: Height 477 mm. Contents: Underpressure air vent, FLOW-cowl.	Black (Ø110)	5	20	Order	732132	
VILPE® ALIPAI FLOW LOW-PITCHED/INCLINED						
Description: Underpressure air vent for ventilating roof structures of a gently sloping felt roof (with pitch of 0–20 degrees). Dimensions: Height 665/668/1022 mm, stem height 200 mm. Contents: Felt Tall pass-through, underpressure air vent pipe, FLOW-cowl, screws.	Black (Ø110/665)	7	24	Stock	732172	
	Black (Ø160/668)	5	48*	Stock	730172	
	Black (Ø160/1022)	3	24*	Stock	730202	
VILPE® ALIPAI FLOW INCLINED						
Description: Underpressure air vent for ventilating roof structures of an inclined felt roof (with pitch of over 11.5 degrees). Dimensions: Height 699 mm. Contents: Felt pass-through, underpressure air vent pipe, FLOW-cowl.	Black (Ø110)	6	48*	Stock	732162	
VILPE® S-ADAPTER Ø110						
Description: For installing VILPE®E120S and ECo110S roof fans on uninsulated, Ø 110 mm Alipai pipes. Contents: Adapter.	Black	10	240	Stock	736922	
VILPE® PVC COLLAR for ALIPAI 110 UNDERPRESSURE AIR VENT						
Description: For facilitating installation of Alipai underpressure air vent to PVC roofing. Fastened to roofing by welding with hot air. Fastened to Alipai with included clamp. Dimensions: Ø 110 mm. Contents: PVC collar, clamp.	Dark grey	10		Stock	730102	
	Light Grey	10		Stock	730103	
VILPE® ALIPAI 160 INSULATION						
Description: Insulation layer for Alipai 160 underpressure ventilation vents for condensation prone buildings. Made of EPS. The insulation layer consists of two parts, which are installed inside the product on the construction site. Dimensions: Inner size Ø 130 mm. Contents: Insulation for 6 pc. Alipai underpressure ventilation vents (2 x 6 pc.).		6		Stock	730192	

Solar pass-throughs

VILPE® Solar pass-throughs are for solar collector pipings, cables or other smaller pipes led through the roof.

The maximum size of the exit hole of the top is 100 x 60 mm. For smaller cords and cables (4 – 50 mm), a separately sold VILPE® Solar cable sealing is available.

An openable and turnable structure makes installation and maintenance easy.



	Colour	Pcs/pack	Pcs/pallet	Delivery	Product No.	
VILPE® SOLAR TILE PASS-THROUGH						
Description: The most common concrete tile roofings with tile width of 330 mm. Replaces one 2-wave concrete tile. Contents: Pass-through, underlay ring, flange, cover, shrinking tube, screws, installation instructions/templates for the underlay ring and the pass-through.	Black	1	24	Stock	75602	
	Grey	1	24	Stock	75607	
	Red	1	24	Stock	75608	
	Brick Red	1	24	Stock	75609	
VILPE® SOLAR UNITILE PASS-THROUGH						
Description: All tile roofings (ceramic, clay, concrete and special tiles, 1- and 2-wave tiles as well as plain tiles). Contents: Pass-through, seal for the upper side, bracket to the bottom, underlay ring, flange, cover, shrinking tube, screws, installation instructions/templates for the underlay seal and the pass-through.	Black	1	20	Stock	756522	
	Grey	1	20	Order	756527	
	Red	1	20	Order	756528	
	Brick Red	1	20	Stock	756529	
VILPE® SOLAR VITTINGE PASS-THROUGH						
Description: Vittinge clay tile roofings. Contents: Pass-through, underlay ring, flange, cover, shrinking tube, screws, installation instructions/templates for the underlay seal and the pass-through.	Brick Red	1	24	Order	75662	
	Brick Red	1	24	Order	75664	
VILPE® SOLAR PROFILED STEEL PASS-THROUGH						
Description: For all round profiled metal sheet roofings (with roof tile pattern). Minimum length of tile pattern is 350 mm. Moldable and fully waterproof due to the rubber seal mounted on the lower surface. Contents: Pass-through, underlay ring, sealing compound, flange, cover, shrinking tube, screws, templates/installation instructions.	Black	1	36	Stock	75632	
	Grey	1	36	Order	75637	
	Red	1	36	Order	75638	
	Brick Red	1	36	Order	75639	
VILPE® SOLAR STEEL PASS-THROUGH						
Description: The most common concrete tile roofings with tile width of 330 mm. Replaces one 2-wave concrete tile. Contents: Pass-through, underlay ring, flange, cover, shrinking tube, screws, installation instructions/templates for the underlay ring and the pass-through.	Black	1	18	Stock	75612	
	Grey	1	18	Order	75617	
	Red	1	18	Order	75618	
	Brick Red	1	18	Order	75619	
VILPE® SOLAR CLASSIC PASS-THROUGH						
Description: For plain standing seam roofings or felt roofings. Retrofittable. Thick rubber seal under the flange. Sealing compound is required separately on felt roofs. Contents: Pass-through, underlay ring, flange, cover, shrinking tube, screws, templates/installation instructions.	Black	1	36	Stock	75622	
	Grey	1	36	Stock	75627	
	Red	1	36	Order	75628	
	Brick Red	1	36	Order	75629	
VILPE® SOLAR FELT TALL PASS-THROUGH						
Description: For felt roofing with roof pitch less than 1:5 (11.5 degrees). Installed between two felt layers. Dimensions: Stem height 200 mm. Contents: Pass-through, flange, cover, shrinking tube, screws, installation instructions.	Black	1	8	Stock	75672	
VILPE® SOLAR FELT PASS-THROUGH						
Description: For new felt roofings. Installed between two felt layers. Contents: Pass-through, flange, cover, shrinking tube, screws, installation instructions/template.	Black	1	12	Order	75642	
VILPE® SOLAR CABLE SEALING						
Description: A rubber seal for VILPE® Solar pass-throughs. Enables 4–50 mm wires and cables to be led watertightly through the roof. Fastens to the Solar pass-through with included weatherproof fastener. Contents: Cable sealing, clamp.				Stock	75701	



Ross ventilation poles

	Colour	Pcs/pack	Pcs/pallet	Delivery	Product No.	
VILPE® ROSS VENTILATION POLE 125/135 Description: For ventilating the crawl space of a house, thus preventing damp damage and radon problems in ground floors. Can also be used as an inlet air pipe. Dimensions: Inner Ø of the angle pipe 125 mm, outer Ø 132 mm. Contents: Cowl, vertical pipe, wall fasteners with screws, angle pipe.	Light Grey	1	24	Stock	790311	
	Black	1	24	Stock	790312	
	Grey	1	24	Stock	790317	
	Red	1	24	Stock	790318	
	Off White	1	24	Stock	790320	
	Beige	1	24	Stock	790321	
VILPE® ROSS VENTILATION POLE 160/170 Description: For ventilating the crawl space of a house, thus preventing damp damage and radon problems in ground floors. Can also be used as an inlet air pipe. Dimensions: Inner Ø of the angle pipe 160 mm, outer Ø 168 mm. Contents: Cowl, vertical pipe, wall fasteners with screws, angle pipe.	Light Grey	1	16	Stock	790361	
	Black	1	16	Stock	790362	
	Grey	1	16	Stock	790367	
	Red	1	16	Stock	790368	
	Off White	1	16	Stock	790370	
	Beige	1	16	Stock	790371	
VILPE® ROSS VENTILATION POLE 200/210 Description: For ventilating the crawl space of a house, thus preventing damp damage and radon problems in ground floors. Can also be used as an inlet air pipe. Dimensions: Inner Ø of the angle pipe 200 mm, outer Ø 208 mm. Contents: Cowl, vertical pipe, wall fasteners with screws, angle pipe.	Light Grey	1	6	Stock	790381	
	Black	1	6	Stock	790382	
	Grey	1	6	Stock	790387	
VILPE® ROSS RENOVATION SET 125/110 Description: For improving the ventilation and updating the appearance of an old vertical pipe of the crawl space. Dimensions: Ø 125/110 mm.	Light Grey	1	20	Stock	790631	
	Black	1	20	Stock	790632	
	Grey	1	20	Stock	790637	
	Red	1	20	Stock	790638	
	Off White	1	20	Stock	790640	
	Beige	1	20	Stock	790641	
VILPE® ROSS RENOVATION SET 160/160 Description: For improving the ventilation and updating the appearance of an old vertical pipe of the crawl space. Dimensions: Ø 160 mm. Contents: Cowl, vertical pipe, wall fasteners with screws, adapter for Ross ventilation pole Ø 160 and a pipe Ø 160 mm.	Light Grey	1	20	Stock	790681	
	Black	1	20	Stock	790682	
	Grey	1	20	Stock	790687	
	Red	1	20	Order	790688	
	Off White	1	20	Stock	790690	
	Beige	1	20	Order	790691	

Reference colour		Reference colour	
	Light grey RAL 7038		Red RAL 3009
	Black RAL 9017		White RAL 9016
	Grey RAL 7015		Beige RAL 1001

Due to printing technical reasons, actual product colours may differ from those shown in the Catalogue.

VILPE® Ross airflow

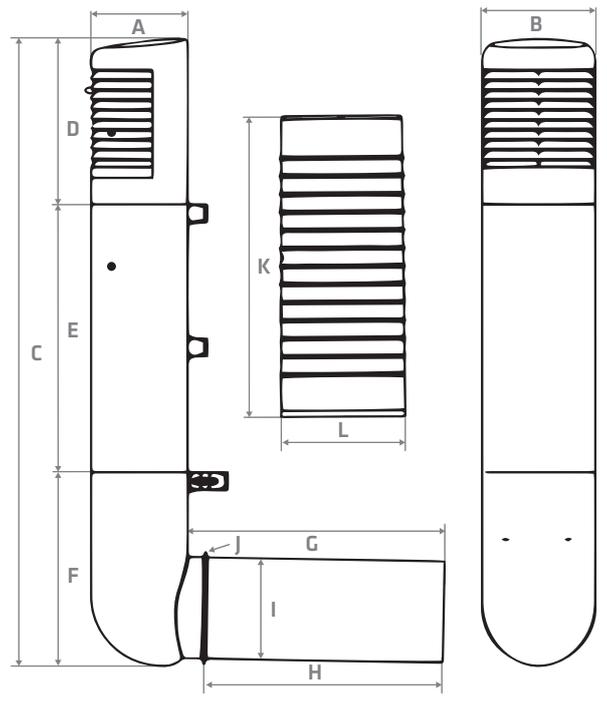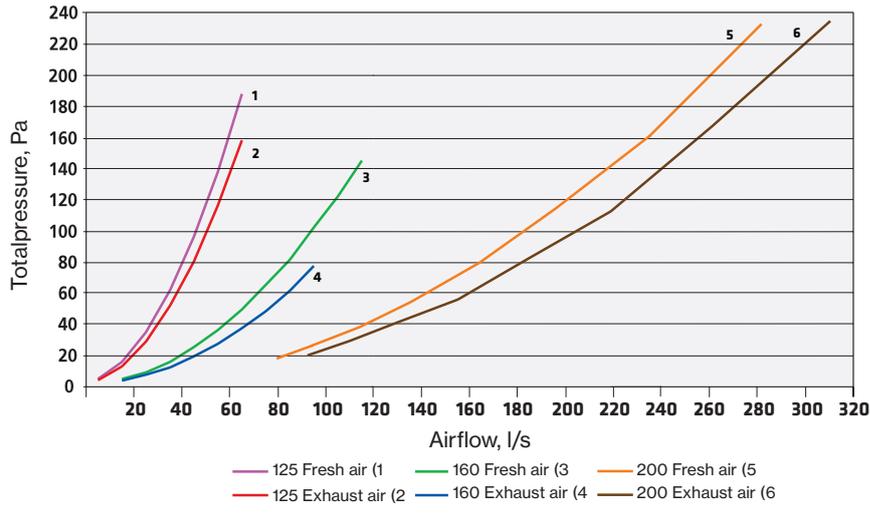

mm	A	B	C	D	E	F	G	H	I	J	K	L
Ross 125/135	111	139	1026	280	445	301	448	415	125	161	500	170
Ross 160/170	159	186	1042	275	445	322	421	392	160	187	500	206
Ross 200/210	210	235	1356	979	178	199	595	-	200	-	500	244

Chimney pass-throughs

VILPE® Chimney pass-throughs for round chimneys

VILPE® Chimney pass-throughs are suitable for insulated, round metal chimneys, available in two sizes. Chimney pass-through set No.1 is for round Ø 200 – 265 mm chimneys, and Chimney pass-through set No.2 is for round Ø 265 – 380 mm chimneys. A plastic chimney pass-through is joined with included rubber seal and clamp. Sealing for underlay, which consists of two plastic components, rubber seal and a butyl strap, prevents water from seeping through the hole made in the underlay, keeping it waterproof. Chimney pass-through can be installed on both metal and tile roofings using VILPE® flashing set. On felt roofings, flashing set is not needed.



VILPE® Roof pass-through for modular chimney

The Roof pass-through for modular chimney is a new pass-through set for 32 x 32...37 x 37 cm chimneys on any type of roofing. The design of the pass-through will merge completely with the roof since it closely resembles the look of most VILPE® pass-throughs by the same manufacturer. The Roof pass-through for modular chimney is completely waterproof and easy to install. All the necessary parts are included in the set and the installation procedure itself is familiar from the VILPE® pass-throughs for round steel chimneys.



	Colour	Pcs/pack	Pcs/pallet	Delivery	Product No.	
VILPE® CHIMNEY PASS-THROUGH SET NO. 1 ROUND						
Description: For passing round, metal, insulated Ø 200–265 mm prefabricated chimneys through the roof. For other than felt roofings, the Chimney underlay seal No. 1 and the Flashing set are also required. Contents: Pass-through, rubber seal and clamp, flashing set, Design and installation manual, fixing screws.	Black	1	12*	Stock	742422	
	Grey	1	12*	Stock	742427	
	Brick Red	1	12*	Stock	742429	
VILPE® CHIMNEY PASS-THROUGH SET NO. 2 ROUND						
Description: For passing round, metal, insulated Ø 270–380 mm prefabricated chimneys through the roof. For other than felt roofings, the Chimney underlay seal No. 2 and the Flashing set are also required. Contents: Pass-through, rubber seal and clamp, flashing set, Design and installation manual, fixing screws.	Black	1	6*	Stock	742432	
	Grey	1	6*	Stock	742437	
	Brick Red	1	6*	Stock	742439	
VILPE® CHIMNEY PASS-THROUGH NO. 1 ROUND						
Description: For passing round, metal, insulated Ø 200–265 mm prefabricated chimneys through the roof. For other than felt roofings, the Chimney underlay seal No 1 and the Flashing set are also required. Contents: Pass-through, rubber seal, clamp, Design and installation manual.	Black	1	14*	Stock	741022	
	Grey	1	14*	Stock	741027	
	Brick Red	1	14*	Stock	741029	
VILPE® CHIMNEY PASS-THROUGH NO. 2 ROUND						
Description: For passing round, metal, insulated Ø 270–380 mm prefabricated chimneys through the roof. For other than felt roofings, the Chimney underlay seal No. 2 and the Flashing set are also required. Contents: Pass-through, rubber seal, clamp, Design and installation manual.	Black	1	6*	Stock	741032	
	Grey	1	6*	Stock	741037	
	Brick Red	1	6*	Stock	741039	
VILPE® CHIMNEY UNDERLAY SEAL						
Description: For other than felt roofings. Prevents water leaking in to the insulation material through the hole that is cut for the underlay. Chimney underlay seal is used with Chimney pass-through No. 1, No. 2 and Roof Pass-Through Modular Chimney. Contents: Two plastic parts, rubber seal and a butyl strip.	Black			Stock	73218	
VILPE® FLASHING EXTENSION CHIMNEY NO. 1						
Description: Facilitates the installation of the chimney further from the ridge. Overlapping 10 cm, length 1100 mm. Dimensions: 650 x 1100 mm. Contents: 1 sheet, seals.	Black	1	19	Stock	742402	
	Grey	1	19	Stock	742407	
	Brick Red	1	19	Stock	742409	
VILPE® FLASHING EXTENSION CHIMNEY NO. 2						
Description: Facilitates the installation of the chimney further from ridge. Overlapping 10 cm, length 1100 mm. Dimensions: 785 x 1100 mm. Contents: 1 sheet, seals.	Black	1	19	Stock	742412	
	Grey	1	19	Stock	742417	
	Brick Red	1	19	Stock	742419	

Chimney pass-throughs

Colour Pcs/pack Pcs/pallet Delivery Product No.

VILPE® VAPOUR STOP 100-380

Description: Vapour barrier seal for round chimney made from silicone rubber.
Contents: Vapour barrier seal.


Black 1 Stock 73217



VILPE® ROOF PASS-THROUGH MODULAR CHIMNEY

Description: For modular chimneys with width of 320 - 370 mm and height from the roofing of 1106 - 1721 mm. For all roofing materials.
Contents: Pass-through, flashing set, installation manual, fixing screws.

Black 1 Stock 742502
 Grey 1 Stock 742507
 Brick Red 1 Stock 742509



VILPE® ROOF PASS-THROUGH MODULAR CHIMNEY FELT

Description: For modular chimneys with width of 320 - 370 mm and height from the roofing of 1106 - 1721 mm. For felt roofing.
Contents: Pass-through, installation manual, fixing screws.


Black 1 Stock 742532
 Grey 1 Stock 742537



VILPE® MODULAR CHIMNEY CASING

Description: For modular chimneys with width of 320 - 370 mm and height from the roofing of 1106 - 1721 mm. For felt roofing.
Contents: Pass-through, installation manual, fixing screws.



Black 1 Stock 742512
 Grey 1 Stock 742517
 Brick Red 1 Stock 742519



VILPE® TILE ADAPTER EPDM

Description: Flexible flue joint for tile roofing. Available for Chimney pass-through No. 1 and Chimney pass-through No. 2. The Chimney No. 2 model is also suitable for Roof pass-through modular chimney.
Contents: Tile adapter EPDM.

No. 1 1 120 Order 742522
 No. 2 1 120 Order 742524
 No. 1 (Bulk) 1 120 Stock 742523
 No. 2 (Bulk) 1 120 Stock 742525

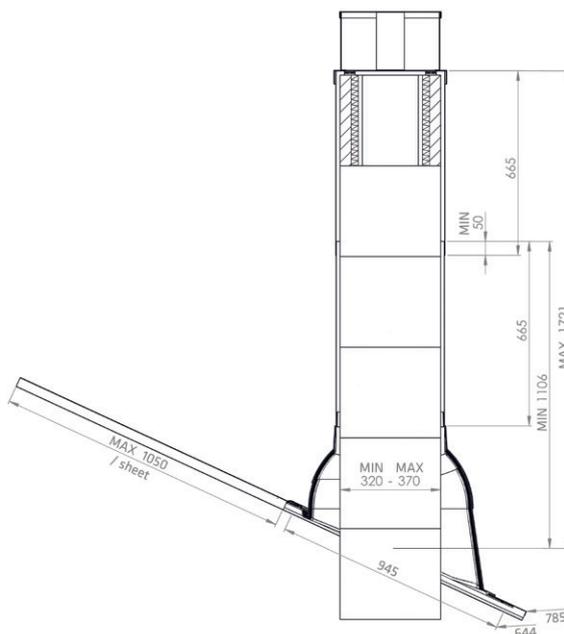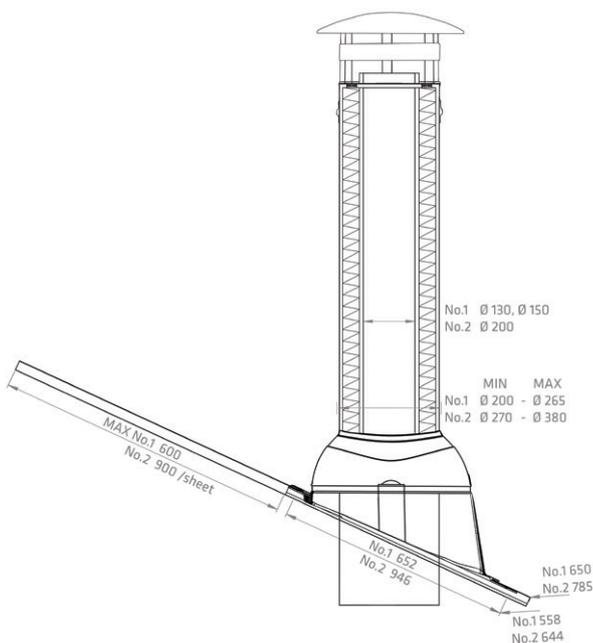

End caps

	Colour	Pcs/pack	Pcs/pallet	Delivery	Product No.
VILPE® STEEL END CAP Description: End cap for metal roofing. Contents: End cap.	Black	500	6000	Order	74022
	Brick Red	500	6000	Order	74030
	Anthracite	500	6000	Order	74023
VILPE® TILE END CAP Description: End cap for tile roof. Contents: End cap.	Black	75	900*	Stock	74050
	Grey	75	900*	Stock	74060
	Red	75	900*	Stock	74052
	Brick Red	75	900*	Stock	74058



Felt roof pass-through seals


	Model	Pcs/pack	Pcs/pallet	Delivery	Product No.
VILPE® FELT ROOF SEAL Description: Roof pass-through seal for round pipes on felt roof. Made of EPDM rubber. Operating temperature -30...+90°C. The flange is installed with hot bitumen between two felt layers. Dimensions: Height 150 mm. The opening is cut according to the pipe diameter. Contents: Seal, clamp.	NO-1 Ø 12/19/25/38	20	480*	Stock	70040
	NO-2 Ø 50/60	20	480*	Stock	70060
	NO-3 Ø 75/90	20	480*	Stock	70090
	NO-4 Ø 110/125	20	480*	Stock	70125
	NO-4.5 Ø 130/140	20	480*	Stock	70130
	NO-5 Ø 150/175	10	480*	Stock	70175
	NO-6 Ø 200/250	10	300*	Stock	70250
	NO-7 Ø 275/325		50	Stock	70325
	NO-8 Ø 350/400	20	50	Stock	70400
	NO-9 Ø 500/525/550/575	1	20	Stock	71050
	NO-10 Ø 600/625/650/675	1	20	Stock	71060
	NO-11 Ø 700/725/750/775	1	20	Stock	71070
NO-12 Ø 800/825/850/875	1	20	Stock	71080	
VILPE® CLAMP Description: Screw-on hot galvanized clamp for fixing the VILPE® Felt roof seal. Dimensions: Width 12 mm. Contents: Clamp.	Ø 24-44		15000	Stock	711601
	Ø 50-145	50	3000	Stock	711714
	Ø 50-215	50	3000	Stock	711721
	Ø 50-370	50	3000	Stock	711737
	Ø 70-570		3000	Stock	711757
	Ø 630	150	150	Stock	711663
	Ø 730	150	150	Stock	711673
VILPE® R-FELT SET Description: For sealing roof pass-throughs for round pipes on felt roof while retrofitting. Contents: Seal, clamp.	Ø 19-90	1	84	Stock	70510
	Ø 110-170	1	48	Stock	70514
	Ø 160-250	1	24	Stock	70518
VILPE® RHS SEAL Description: For sealing pass-throughs for square pipes on felt roof. The clamp is chosen according to the pipe size. Contents: Seal.	40x40/50x50/ 60x60/70x70	20	480*	Stock	71090
	80x80/100x100/ 120x120/140x140	10	480*	Stock	71094
VILPE® RHS-FELT RETROFIT 80-150 Description: For sealing roof pass-through for square pipes on felt roof while retrofitting. Patented installation solution. Content: Seal.	Ø 80-150			Stock	71745
	40 X 40		1200*	Stock	711198
VILPE® RHS CLAMP Description: Hot-dip-galvanized clamp for fixing square VILPE® RHS Seal. The clamp is chosen according to the pipe size. Contents: Two-piece clamp.	50 X 50		1200*	Stock	71120
	60 X 60		1200*	Stock	71122
	70 X 70		1200*	Stock	71123
	80 X 80		1200*	Stock	71124
	90 X 90		1200*	Stock	71125
	100 X 100		1200*	Stock	71126
	120 X 120		1200*	Stock	71128
140 X 140		1200*	Stock	711282	
150 X 150		1200*	Stock	711284	



Metal roof pass-through seals

	Model	Pcs/pack	Pcs/pallet	Delivery	Product No.	
VILPE® ROOFSEAL RETROFITTING SET						
Description: Made of EPDM rubber. The seal has a moldable aluminium flange. Contents: Seal, screws, sealing compound and clamp.	Ø 10-100	1	84	Stock	71742	
	Ø 100-23	1	36	Stock	71744	
VILPE® CLAMP RST						
			500	Stock	711690	
VILPE® ROOFSEAL						
Description: Made of EPDM rubber. The seal has a moldable aluminium flange. Contents: Seal.	NO-1 Ø 12/19/25/28/38/50/60/75/90		500	Stock	71701	
	NO-2 Ø 75/90/110/125/150		500	Stock	71702	
	NO-3 Ø 110/125/150/175/200		500	Stock	71703	
	NO-4 (7) Ø 140-292	10	50	Stock	71716	
	NO-5 (8) Ø 171-343	5	50	Stock	71717	
	NO-6 (9) Ø 241-521	5	50	Stock	71718	
VILPE® ROOFSEAL SET						
Description: Made of EPDM rubber. The seal has a moldable aluminium flange. Contents: Seal, screws, sealing compound and clamp.	NO-1 Ø 12/19/25/28/38/50/60/75/90	1	255	Stock	71721	
	NO-2 Ø 75/90/110/125/150	1	204	Stock	71722	
	NO-3 Ø 110/125/150/175/200	1	240	Stock	71723	
	NO-4 (7) Ø 140-292	1	36	Stock	71726	
	NO-5 (8) Ø 171-343	1	36	Stock	71727	
	NO-6 (9) Ø 241-521	1	24	Stock	71728	

Vapour barrier seals

	Model	Pcs/pack	Pcs/pallet	Delivery	Product No.	
VILPE® VAPOUR BARRIER SEAL						
Description: For sealing the vapour barrier. Dimensions: Height 33 mm. Contents: Seal made of EPDM rubber.	HT-50 Ø 50	20	480*	Stock	71205	
	HT-75 Ø 75	20	480*	Stock	71207	
	HT-110 Ø 110	20	480*	Stock	71211	
	HT-125 Ø 125	20	480*	Stock	71213	
	HT-160 Ø 160	20	480*	Stock	71216	
VILPE® VAPOUR BARRIER SEAL, TALL						
Description: For sealing the vapour barrier. Dimensions: Height 133 mm. Contents: Seal made of EPDM rubber.	HTH-110 Ø 110	15	480*	Stock	71212	

PVC roof pass-through seals

	Model	Pcs/pack	Pcs/pallet	Delivery	Product No.	
VILPE® PVC ROOF SEAL						
Description: For sealing pass-throughs for round pipes on PVC roofing. Fastened by welding with hot air. Dimensions: Duct sizes Ø 12-100 mm and 110-160 mm. Contents: Seal made of PVC, clamp.	Ø 12-100 mm Light Grey	10		Stock	70601	
	Ø 12-100 mm Dark grey	10		Stock	70602	
	Ø 110-160 mm Light Grey	10		Stock	70611	
	Ø 110-160 mm Dark grey	10		Stock	70612	



Acid-resistant stainless steel roof drains

VILPE's range of roof drains is complemented by metal roof drains. The new roof drains are made of acid-resistant steel (A4 / 316) and are designed to withstand even the most demanding climatic conditions. The roof drain flange is ready-primed to facilitate fastening. Roof drains are needed on flat roofs, where rain water is directed inwards on the roof and is discharged by the roof drains into a leader or downspout.

A wide range of accessories, including heating elements, plastic leaf gratings and condensation insulation is available for metal roof drains. The builder can always tailor the whole setup to the site. Accessories can be connected to roof drains at the factory during assembly, or the customer can assemble them themselves.

Roof drains offer flexibility, as metal roof drains can be cut to fit the dimensions of the area. Note: an exception is the C-90 200 roof drain, which is installed as-is on renovation sites.

With the new products, customers will have even more choice, as VILPE's range now includes roof drains made of both metal and polypropylene. Roof drains are completely waterproof. Cleaning of the drains is simple, as the leaf grating is easy to remove.

Metal roof drains are suitable for all gently sloping roofs. The products can also replace old roof drains, making them an excellent choice for renovation sites.

Model A roof drains have a drain bowl. They are suitable for sites where water volume dimensioning requires greater flow through the roof drain, as model A roof drains have a larger filter than model C roof drains of a similar size. There is no drain bowl in model C roof drains.

The pipe sizes of the roof drains are 75, 110 or 160 mm, and different lengths are available for them, starting from 350 mm.

Roof drains have been designed and tested in accordance with the SFS EN 1253-2 standard. The tests include mechanical stress on grating and drain, overpressure with water, underpressure with air, and flow rate measurements with and without a grating.

Measured flow values

Model	Without a grating (l/s)	With a grating (l/s)
C-75	2,2	1,8
C-110	5,3	4,8
C-160	8,2	7,8
A-75	5,7	4,5
A-110	6,1	5,7
A-160	8,2	7,9


Plastic Gratings

Model Product No.

PLASTIC LEAF GRATING FOR MODEL A ROOF DRAIN

Applications: Prevents leaves and debris from entering the roof drain. Compatible with 75-160-mm model A roof drain
Contents: Plastic leaf grating


A 75-160 392209



PLASTIC LEAF GRATING FOR MODEL C ROOF DRAIN

Applications: Prevents leaves and debris from entering the roof drain. Compatible with model C roof drains.
Contents: Plastic leaf grating

C-75 392205
 C-90 392206
 C-110 392207
 C-160 392208



	A	B
C-75	68	88
C-90	83	103
C-110	103	123
C-160	154	174


Roof drain, Model A

Lenght Product No.

ACID-RESISTANT STEEL ROOF DRAIN, MODEL A Ø 75

350 mm 390001
600 mm 390002
750 mm 390003
1000 mm 390004


Applications: A roof drain with primed flanging for gently sloping roofs. Model A roof drains have a collecting basin. Model A leaf grating is included.
Contents: Roof drain, plastic grating.

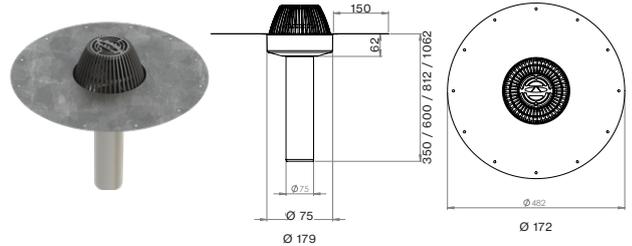

ACID-RESISTANT STEEL ROOF DRAIN, MODEL A Ø 110

350 mm 390021
600 mm 390022
750 mm 390023
1000 mm 390024


Applications: A roof drain with primed flanging for gently sloping roofs. Model A roof drains have a collecting basin. Model A leaf grating is included.
Contents: Roof drain, plastic grating.

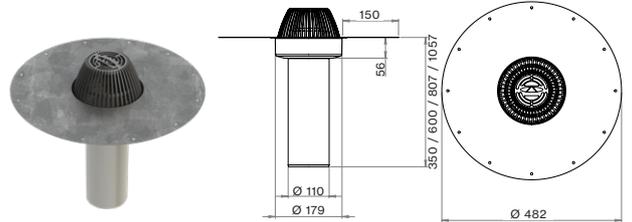

ACID-RESISTANT STEEL ROOF DRAIN, MODEL A Ø 160

350 mm 390031
600 mm 390032
750 mm 390033
1000 mm 390034

Applications: A roof drain with primed flanging for gently sloping roofs. Model A roof drains have a collecting basin. Model A leaf grating is included.
Contents: Roof drain, plastic grating.

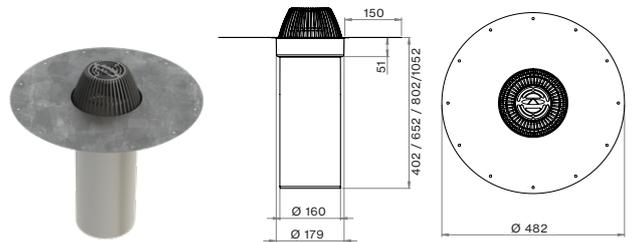


Roof drain, Model C

Lenght Product No.

ACID-RESISTANT STEEL ROOF DRAIN, MODEL C Ø 75

350 mm 391001
600 mm 391002
750 mm 391003
1000 mm 391004


Applications: A roof drain with primed flanging for gently sloping roofs. Model C leaf grating is included.
Contents: Roof drain, plastic leaf grating.

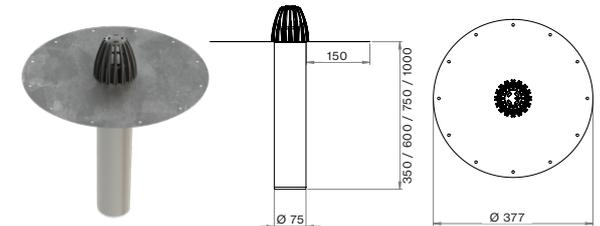

ACID-RESISTANT STEEL ROOF DRAIN, MODEL C Ø 90

200 mm 391011


Applications: A roof drain with primed flanging for gently sloping roofs. Model C leaf grating is included.
Contents: Roof drain, plastic leaf grating.

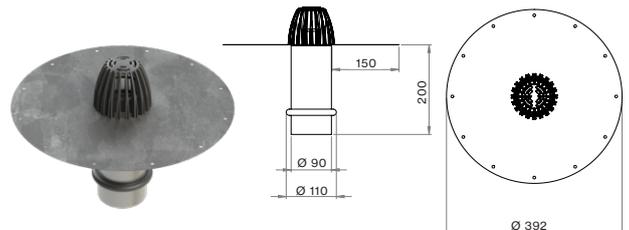

ACID-RESISTANT STEEL ROOF DRAIN, MODEL C Ø 110

350 mm 391021
600 mm 391022
750 mm 391023
1000 mm 391024


Applications: A roof drain with primed flanging for gently sloping roofs. Model C leaf grating is included.
Contents: Roof drain, plastic leaf grating.

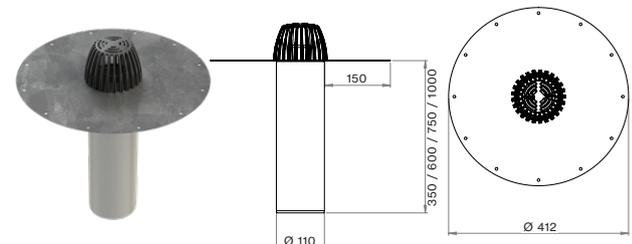

ACID-RESISTANT STEEL ROOF DRAIN, MODEL C Ø 160

350 mm 391031
600 mm 391032
750 mm 391033
1000 mm 391034


Applications: A roof drain with primed flanging for gently sloping roofs. Model C leaf grating is included.
Contents: Roof drain, plastic leaf grating.

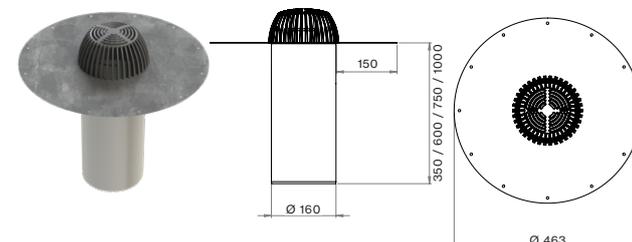

	Model	Product No.
HEATING ELEMENT FOR ROOF DRAIN Applications: A self-adjusting heating element to prevent roof drains from freezing. Contents: Heating element, 1,5 m connection cable and protective cup.	75 14W	392000
	110 14W	392002
	160 14W	392003
	75 16W	392010
	110 16W	392011
	160 16W	392012
	160 32W	392004



BITUMEN FLANGE FOR ROOF DRAIN Applications: A factory-installed bitumen flange speeds up installation on bitumen sheet covering and ensures waterproof fastening of the drain. Dimensions: 500x500 mm Contents: Bitumen flange	75-90	392210
	110	392211
	C-160/A-75-160	392212



CUT TO SPECIFIC LENGTH 396000

CONDENSATION INSULATION FOR MODEL A ROOF DRAIN

Applications: Prevents condensation in roof drains. The insulation material is installed outside the pipe and around the collecting basin.
Dimensions: Insulation thickness 13 mm.
Contents: Condensation insulation.

Model	Product No.
A-75 350	395001
A-75 600	395002
A-75 750	395003
A-75 1000	395004
A-110 350	395021
A-110 600	395022
A-110 750	395023
A-110 1000	395024
A-160 350	395031
A-160 600	395032
A-160 750	395033
A-160 1000	395034

CONDENSATION INSULATION FOR MODEL C ROOF DRAIN

Applications: Prevents condensation in roof drains. The insulation material is installed outside the pipe.
Dimensions: Insulation thickness 13 mm.
Contents: Condensation insulation.

Model	Product No.
C-75 350	395101
C-75 600	395102
C-75 750	395103
C-75 1000	395104
C-110 350	395121
C-110 600	395122
C-110 750	395123
C-110 1000	395124
C-160 350	395131
C-160 600	395132
C-160 750	395133
C-160 1000	395134



Roof drains

	Model	Pcs/pack	Pcs/pallet	Delivery	Product No.	
VILPE® AM ROOF OUTLET BITUMEN Description: For all multiple and single-ply bitumen felt roofings. AM-75 roof outlets can be used either for a symphonic system or a conventional system. Contents: Outlet, leaf grating, sealing compound.	Ø 75 mm	8	64*	Stock	72007	
	Ø 90 mm	8	32	Order	72009	
	Ø 110 mm	8	64*	Stock	72011	
	Ø 110/630 mm	5	35	Order	72012	
	Ø 160 mm	6	48	Stock	72013	
VILPE® AM ROOF OUTLET PROTAN DARK GREY Description: For Protan roofing. Contents: Outlet, leaf grating, sealing compound.	Ø 110 mm	8	64*	Order	72048	
	Ø 160 mm	6	48*	Order	72049	
	Ø 110/630 mm	5	35	Order	72062	
VILPE® AM ROOF OUTLET PROTAN LIGHT GREY Description: For Protan roofing. Contents: Outlet, leaf grating, sealing compound.	Ø 110 mm	8	32	Order	72052	
	Ø 160 mm	6	48*	Order	72053	
VILPE® AM ROOF OUTLET ALKORPLAN LIGHT GREY Description: For Alkorplan roofing. Contents: Outlet, leaf grating, sealing compound.	Ø 110 mm	8	64*	Stock	72044	
	Ø 110/630 mm	5	35	Order	72045	
VILPE® AM THERMOCABLE 230V / 14W Description: For heating of AM roof outlet. Contents: Thermocable.	AM-outlets Ø 50/75/90/110			Order	72000	
	AM-outlets Ø 160			Order	72001	
VILPE® AM LEAF GRATING Description: Prevents leaves and other debris from entering the roof outlet. Contents: Leaf grating.				Order	72130	
VILPE® AM SYMPHONIC GRATING Description: Prevents leaves and other debris from entering the roof outlet. Contents: Symphonic grating.		100	400	Order	72140	
VILPE® CM ROOF OUTLET Description: For bitumen felt roofing. The 150 mm wide flange is installed between two felt layers. Contents: Outlet, leaf grating.	Ø 75 mm	18	72	Stock	72407	
	Ø 110 mm	20	80	Stock	72411	
VILPE® LEAF GRATING BALL Description: Prevents leaves and other trash from entering the roof outlet. Suitable for 75 - 125 mm roof outlets. Contents: Leaf grating.				Stock	72424	
VILPE® CM LEAF GRATING Description: Prevents leaves and other debris from entering the roof outlet. Contents: Leaf grating.		50	400	Order	72420	
				Order	72422	

Fasteners

	Model	Pcs/pack	Pcs/pallet	Delivery	Product No.
VILPE® NV DISTANCE PIECE	NV-30	200	22400*	Stock	21335
Description: Used in board clad exterior wall construction as a distance piece between the frame and the fixing battens of the external cladding. The construction made with distance pieces improves the heat insulation and saves in timber material. The distance piece is selected according to the thickness of the insulation. Suitable for use with both soft and hard insulation. Contents: NV distance piece.	NV-40	200	16800*	Order	21345
	NV-50	200	16800*	Stock	21360
	NV-55	200	16800*	Stock	21365
	NV-70	200	15000*	Stock	21270



VILPE® WASHER Description: LSK washer Ø 60 mm is used for attachment of light insulation panels e.g. to wall. Y40-PA Ø 40 mm black polyamide (nylon) washer fastens, for example, single-ply roof covering to fix-layer of concrete or wood. Y40-PP Ø 40 mm washer fastens insulating or acoustic panels. ZN washer is made of galvanized sheet metal. Contents: Washer.	LSK-60	450	37800	Stock	20001
	Y40-PA	500	90000	Stock	01005
	Y40-PP	500	90000	Stock	010047
	ZN-40	1000	50000	Stock	9546024
	ZN-50	500	30000	Stock	9546025
VILPE® KFR 4.2 SCREW Description: Corrosion protected screw for washers. Contents: Screw.	4.2x25 SCREW	1000		Stock	403025
	4.2x32 SCREW	500		Stock	403032
	4.2x38 SCREW	500		Stock	403038
	4.2x45 SCREW	500		Stock	403045
	4.2x55 SCREW	500		Stock	403055
	4.2x65 SCREW	500		Stock	403065



Power

	Model	Pcs/pack	Pcs/pallet	Delivery	Product No.
VILPE® POWER A (SQUARE BODY) Description: For fastening new roof covering and insulation material to an old bitumen felt roofing or for fastening an insulation sheet to another insulation material (e.g. Styrox, foam sheets, polyurethane sheets). The length of the fastener is chosen according to the insulation thickness. Made of strong polyamide (nylon), the basic colour is black. The square body is stronger and prevents the tool from spinning around during the installation. Dimensions: Flange Ø 50 mm, spiral size Ø 28 mm. Contents: Power A fastener.	60, 00 mm	250	6000	Stock	284060
	70, 00-20 mm	250	6000	Stock	284070
	90, 20-40 mm	250	6000	Stock	284090
	110, 40-60 mm	250	4500	Stock	284110
	130, 60-80 mm	250	4500	Stock	284130
	150, 80-100 mm	250	3000	Stock	284150
	175, 100-120 mm	250	3000	Stock	28175
	200, 130-150 mm	250	2000	Stock	28200
	225, 160-170 mm	250	1000	Stock	28225



Power tools

	Model	Length	Delivery	Product No.
Powers with round body are installed with 6-angle installation bits. It depends on the hole size of the Power if Power bit or Torx bit can be used. Power A Adjustables can only be installed with the longer bits. Power with square body is installed with square special bit.	350-2X TORX BIT	350	Stock	910135
	500-2X TORX BIT	500	Stock	910150
	POWER-350	350	Stock	90133



Croco 512

	Model	Pcs/pack	Pcs/pallet	Delivery	Product No.
VILPE® CROCO 512 Description: For fastening the roof covering and insulation sheet to aerated concrete (Siporex). The length of the fastener is chosen according to the insulation thickness so that the fastener will be at least 50 mm deep in the base. A hole of Ø 12 mm and 50-70 mm deep must be pre-drilled. Expansion plug which fastens the fastener to aerated concrete is included. Dimensions: Flange Ø 50 mm. Contents: Croco 512 fastener, expansion plug.	00-10 mm	500	12000	Stock	054010
	10-30 mm	500	9000	Stock	054030
	30-50 mm	500	9000	Stock	054050
	50-70 mm	500	6000	Stock	054070
	80-100 mm	500	6000	Stock	054100
	100-120 mm	500	6000	Stock	054120
	120-140 mm	500	4000	Stock	054140
	140-160 mm	500	4000	Stock	054160
	180-200 mm	250	3000	Stock	054200
	230-250 mm	250	3000	Stock	054250
	280-300 mm	250	7000*	Order	054300
	330-350 mm	250	7000*	Order	054350
	380-400 mm	250	7000*	Order	054400



Croco-512 tools

For Croco 512 a hole of Ø 12 mm is drilled with edge drill to the aerated concrete (Siporex). The steel wedge of the 60-300 mm long Croco 512 -fastener is installed with setting tool or peg for setting tool. The steel wedge of the 250-500 mm long Croco 512 -fastener is installed with handpeg.

Model	Lenght	Delivery	Product No.
512-DRILL 12X400		Stock	90400
SETTING TOOL 308/512 (Croco-512: 60 - 300 mm)		Stock	90010
PEG FOR SETTING TOOL (Croco-512: 60 - 300 mm)	320	Stock	90011
480-HANDPEG (Croco-512: 250 - 500 mm) total lenght 600 mm	480	Stock	90048



Croco A and Croco B

VILPE® CROCO A

Description: For fastening single ply membrane roof covering when the fix-layer is sheet metal, concrete or wood. Croco A fastener is fastened to the fix-layer with a roof screw, a concrete screw or a concrete nail. There are four studs in the flange of Croco A to increase the tear resistance. The length is chosen according to the insulation thickness and the screw or the nail.

Dimensions: Flange Ø 50 mm.

Contents: Croco A fastener.

Model	Pcs/pack	Pcs/pallet	Delivery	Product No.
CROCO A-20	500	56000*	Order	02020
CROCO A-30	500	56000*	Order	02030
CROCO A-50	500	18000*	Order	02050
CROCO A-80	500	28000*	Order	02080
CROCO A-100	500	18000*	Stock	02100
CROCO A-120	500	14000*	Stock	02120
CROCO A-150	500	14000*	Stock	02150
CROCO A-170	500	8000*	Stock	02170
CROCO A-200	500	8000*	Stock	02200
CROCO A-230	250	7000*	Stock	02230
CROCO A-250	250	4000*	Stock	02250
CROCO A-300	250	5000*	Stock	022300
CROCO A-350	250	5000*	Stock	022350
CROCO A-400	250	3000*	Stock	022400
CROCO A-450	250	3000*	Stock	022450
CROCO A-500	250	3000*	Stock	022500
CROCO A-550	125	3000*	Stock	022550
CROCO A-600	125	3000*	Stock	022600
CROCO A-650	125	3000*	Stock	022650
CROCO A-700	125	3000*	Stock	022700




VILPE® CROCO B

Description: For fastening hard insulating sheets or bitumen roof covering and insulating sheets when the fix-layer is sheet metal, concrete or wood. The Croco B fastener fastens to the fix-layer with a roof screw, a concrete screw or a concrete nail. The length is chosen according to the insulation thickness and the screw or the nail.

Dimensions: Flange Ø 50 mm.

Contents: Croco B fastener.

CROCO B-20	500	56000*	Stock	02520
CROCO B-30	500	56000*	Stock	02530
CROCO B-50	500	42000*	Stock	02550
CROCO B-80	500	28000*	Stock	02580
CROCO B-100	500	18000*	Stock	02600
CROCO B-110	500	18000*	Stock	02610
CROCO B-120	500	14000*	Stock	02620
CROCO B-140	500	14000*	Stock	02640
CROCO B-150	500	14000*	Stock	02650
CROCO B-170	500	8000*	Stock	02654
CROCO B-200	500	8000*	Stock	02660
CROCO B-230	250	7000*	Stock	02664
CROCO B-250	250	7000*	Stock	02670
CROCO B-260	250	7000*	Stock	02674
CROCO B-290	250	7000*	Stock	02678
CROCO B-300	250	5000*	Stock	02680
CROCO B-350	250	5000*	Stock	02690
CROCO B-400	250	3000*	Stock	02700
CROCO B-450	250	3000*	Stock	02710
CROCO B-500	250	3000*	Stock	02720
CROCO B-550	125	3000*	Stock	02730
CROCO B-600	125	3000*	Stock	02740

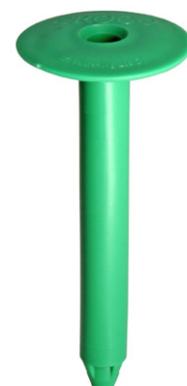

VILPE® CROCO ADJUSTABLE SCREW

Description: For fastening Croco B fastener. The head of the screw is of the model Torx 25 (TX25). The screw can be adjusted.

Dimensions: Socket: 125/80 mm, Ø 7 mm. Screw: 6.3 x 150/95 TX25.

Contents: Socket, screw.

150 mm	250	21000	Stock	02703
95 mm	250	27000	Stock	02704



Croco nails and screws

VILPE® KLA CONCRETE NAIL

Description: For fastening Croco B-110 and Croco A-110 fasteners to a concrete fix-layer. The length of the nail is chosen according to the insulation thickness and the fastener so that the installation depth is at least 20 mm. Drill size is Ø 5 mm. Can also be used to fasten timber, sheet metal etc.

Dimensions: 35 - 155 mm

Contents: Concrete nail



VILPE® KLA-ROOF SCREW NO-1 TX

Description: For fastening Croco B-110 and Croco A-110 fasteners to sheet metal or wooden fix-layer. No. 1 screw drills down max. 1.25 mm thick sheet metal. No. 3 screw is used for thicker materials. The length of the screw is chosen according to the insulation thickness and the length of the fastener so that the screw pierces the steel at least 15 mm.

Dimensions: 40 -150 mm

Contents: KLA roof screw TX



VILPE® CONCRETE SCREW TX

Description: For fastening Croco B-110 and Croco A-110 fasteners to concrete fix-layer. The length of the screw is chosen according to the insulation thickness and the length of the fastener so that the installation a is at least 20 mm. Drill size is Ø 5 mm. Can also be used to fasten timber, sheet metal etc.

Dimensions: 40 -150 mm

Contents: Concrete screw TX



Croco B and Croco A tools

For the concrete nail of Croco B 110 is drilled Ø 5 mm hole with drill bit which is fastened to drill bit extension. The normal SDS+ drills can be used when the insulation is not very thick. The concrete nails are installed with blow stick and drilling hammer.

Double-ended installation bit for Drill point screws and Croco B-110. Length of the bit is chosen according to length of the fastener. We recommend that the bit is at least 30 mm longer than the fastener.

A T-25 (7 mm) Torx tool is suitable for installation. If installing the product on concrete, an M drill and an M drill extension or similar tools are also needed. The Torx tool and M drill with extension are sold separately.

Model	Length	Delivery	Product No.
KLA-35 CONCRETE NAIL	35 mm	Order	67035
KLA-45 CONCRETE NAIL	45 mm	Order	67045
KLA-55 CONCRETE NAIL	55 mm	Order	67055
KLA-60 CONCRETE NAIL	60 mm	Order	67060
KLA-65 CONCRETE NAIL	65 mm	Order	67065
KLA-75 CONCRETE NAIL	75 mm	Order	67075
KLA-85 CONCRETE NAIL	85 mm	Order	67085
KLA-95 CONCRETE NAIL	95 mm	Order	67095
KLA-105 CONCRETE NAIL	105 mm	Order	67105
KLA-115 CONCRETE NAIL	115 mm	Order	67115
KLA-125 CONCRETE NAIL	125 mm	Order	67125
KLA-135 CONCRETE NAIL	135 mm	Order	67135
KLA-145 CONCRETE NAIL	145 mm	Order	67145
KLA-155 CONCRETE NAIL	155 mm	Order	67155
KLA-40 1-DRILL ROOFSCREW TORX	40 mm	Stock	425040
KLA-50 1-DRILL ROOFSCREW TORX	50 mm	Stock	425050
KLA-70 1-DRILL ROOFSCREW TORX	70 mm	Stock	425070
KLA-90 1-DRILL ROOFSCREW TORX	90 mm	Stock	425090
KLA-110 1-DRILL ROOFSCREW TORX	110 mm	Stock	425110
KLA-130 1-DRILL ROOFSCREW TORX	130 mm	Stock	425130
KLA-150 1-DRILL ROOFSCREW TORX	150 mm	Stock	425150
NO-3 KLA-50 DRILLSCREW TORX	50 mm	Stock	427050
NO-3 KLA-70 DRILLSCREW TORX	70 mm	Stock	427070
NO-3 KLA-90 DRILLSCREW TORX	90 mm	Stock	427090
NO-3 KLA-110 DRILLSCREW TORX	110 mm	Stock	427110
NO-3 KLA-130 DRILLSCREW TORX	130 mm	Stock	427130
NO-3 KLA-150 DRILLSCREW TORX	150 mm	Stock	427150
CONCRETE SCREW 6.3 x 35 TX 25	35 mm	Stock	672035
CONCRETE SCREW 6.3 x 50 TX 25	50 mm	Stock	672050
CONCRETE SCREW 6.3 x 60 TX 25	60 mm	Stock	672060
CONCRETE SCREW 6.3 x 70 TX 25	70 mm	Stock	672070
CONCRETE SCREW 6.3 x 80 TX 25	80 mm	Stock	672080
CONCRETE SCREW 6.3 x 90 TX 25	90 mm	Stock	672090
CONCRETE SCREW 6.3 x 100 TX 25	100 mm	Stock	672100
CONCRETE SCREW 6.3 x 110 TX 25	110 mm	Stock	672110
CONCRETE SCREW 6.3 x 120 TX 25	120 mm	Stock	672120
CONCRETE SCREW 6.3 x 130 TX 25	130 mm	Stock	672130

Model	Length	Delivery	Product No.
065-2X TORX BIT	65	Stock	910065
150-2X TORX BIT	150	Stock	910115
350-2X TORX BIT	350	Stock	910135
500-2X TORX BIT	500	Stock	910150
700-2X TORX BIT	700	Stock	910170
K-DRILL 5/28 (90270)		Stock	90274
K-DRILL EXTENSION-400 SDS	400	Stock	90270
K-DRILL EXTENSION-600	600	Stock	90272
K-DRILL EXTENSION-800	800	Stock	90277
5X150/210 SDS+DRILL		Stock	9515206
BLOW STIK-600 SDS+	600 ⁽¹⁾	Stock	90238
BLOW STIK-800 SDS+	800 ⁽²⁾	Stock	90240
M-DRILL 5/35		Stock	90290
M-DRILL 5/55		Stock	90291
M-DRILL EXTENSION	750	Stock	90292
700-2X (7 mm) TORX BIT ADJUSTABLE	700	Stock	910180

⁽¹⁾using length 400 mm

⁽²⁾using length 600 mm



General Terms of Sale

1. Applicability

These terms are the general terms of sale of VILPE Oy. If these terms have been approved once in a trade between the parties, they shall be regarded as approved also in subsequent trades. If one party has in fact been informed of the terms based on a previous trade, the terms shall apply also to the first trade, even if the terms have not been specifically approved. These terms do not apply to agency trade.

2. Closing a Sale

2.1. Tender

The Supplier's tender is valid for the period mentioned in the tender. If no validity period has been mentioned, it is 30 days. All pictures, drawings, calculations and other documents related to the tender remain the Supplier's property. The recipient of the tender may not use them to the Supplier's disadvantage, disclose them to a third party or otherwise utilise them.

2.2. Order

In an order-based sale, an agreement is made when the Buyer indicates approval of the Supplier's tender as such. Otherwise, the sale is closed after the Supplier has confirmed the order or delivered the item(s).

3. Supplier's Responsibilities

3.1. Delivery Time

Unless otherwise agreed, the delivery time shall be considered to start at the below-mentioned time that is the latest:

- Date of the agreement
- In sales requiring an official permit, the date the Supplier received the permit declaration
- Date the agreed security or advance payment was given
- Date the Buyer supplied the information required for the delivery

3.2. Terms of Delivery

EXW Mustasaari Finland (Incoterms 2020). Additional pallet charge.

3.3. Warranty

The sold goods have a valid warranty according to the manufacturer's terms.

3.4. Properties of Product

The Supplier is responsible for the quality and other properties of a product only according to the information specified in the agreement and other information provided by the Supplier. The Buyer is responsible for the correctness of the information provided to the Supplier concerning the application of the product. With respect to product liability, the Buyer shall carefully study all the Supplier's specifications, instructions and descriptions concerning the product and act according to the limitations they require. The products shall absolutely be used only in the manner and in the applications they are intended for. If there is any uncertainty, the Buyer shall establish the suitability of the product for the intended use. When using the product, all instructions provided separately by the Supplier and common caution shall be followed. With respect to both product liability and product safety, the Buyer shall inform a new buyer of the matters known to him in case of a resale or transfer. The Supplier shall be immediately notified in writing of all issues related to product liability and product safety, and legal proceedings shall be initiated within three (3) years after the Buyer first became aware of any damage or liability for damages.

3.5. Indirect Damage

The Supplier is not liable for indirect damage to the Buyer due to a delay or faults in the delivery.

4. Buyer's Liability

4.1. Selling Price

The selling price is the price agreed by the parties. If the price has not been agreed, the selling price is the going price charged by the Supplier.

4.2. Term of Payment

The term of payment is determined by the common term of payment in the sector, 14 days net. Calculation of term of payment starts on the invoice date for warehouse deliveries and on delivery date for factory deliveries. Any remarks regarding the invoice must be done within 8 days from the start of the invoice date.

4.3. Revising the Purchase Price

The Supplier reserves the right to revise prices, should the exchange rates that directly affect the sale prices, VAT, import fees or other fees, taxes or tax-like fees independent of the Supplier change before the delivery date.

4.4. Interest for Delay and Collection Costs

Should the payment be delayed, an interest of 10 % is charged for the delayed time. In addition to the interest for delay, the Supplier may also recover the collection costs.

4.5. Securities

If giving security has been agreed, the security shall be given before the delivery of the products is started. The Supplier may require also later that a security for the sale price be paid if he has good reason to believe that the sale price or a part of it would not be paid. The Supplier may delay further deliveries until overdue payments have been paid or an acceptable security has been given. The Supplier is entitled to this also when an overdue part of the sale price has not been paid. The Buyer has no right to make any claims because of this delay.

4.6. Inspection of Product

The buyer is obliged to check the quantity and quality of the goods at the time of receipt and to indicate any deviations and acknowledgment of receipt. The Buyer shall immediately notify the Supplier or the carrier of a fault or a shortage in the delivery.

4.6. Complaint and Rectifying an Error

If a delivery is faulty in part, the Buyer shall notify the Supplier, in writing, of the error within 7 working days of the delivery date. The Supplier may primarily repair the fault or deliver a new product. The Buyer cannot require a delivery if a change has occurred in the conditions that significantly alters the relationship of the originally agreed performance obligations.

5. Termination

5.1. Buyer's Right to Terminate

If the Supplier's delivery essentially differs from what was agreed and the fault is not repaired within a reasonable time after the Buyer's written complaint, or if a new product according to the agreement is not delivered or if the delivery is delayed due to the Supplier in a manner causing unreasonable inconvenience to the Buyer, the Buyer has the right to terminate the agreement. If the product being the subject of the sale has been manufactured, purchased or packed especially for the Buyer according to his instructions and wishes and the Supplier cannot utilise the product without loss in other ways, the Buyer may cancel the sale due to the Supplier's delay only if the purpose of the sale cannot be integrally achieved because of the delay.

5.2. Supplier's Right to Terminate

If the selling price is not paid during the time limit, not due to the Supplier, the Supplier may cancel the sale or that part of the sale, the products of which the Buyer has not yet received, should the delay be significant. The Supplier has the right to terminate when based on the Buyer's declaration or otherwise it can be assumed that the Buyer's payment will be significantly delayed. Furthermore, the Supplier may terminate the sale if the Buyer does not contribute to the sale as agreed or otherwise reasonably expected.

5.3. Force Majeure

The Supplier is not liable for fulfilling the agreement if an act of God, fire, machine damage or a comparable disturbance, strike, lockout, war, mobilisation, export or import ban, lack of transport equipment, terminated manufacture, traffic disturbance or similar obstructions beyond the Supplier's control prevent the delivery of a product or its part. In addition, when fulfilling the agreement would require sacrifices unreasonable compared to the benefits to be occurred by the Buyer, the Supplier is not required to fulfil the contract. The Supplier is not liable to compensate to the Buyer any damage caused by nonfulfilment of the agreement, and he may also cancel the agreement.

6. Insurance

The parties shall insure the products according to the responsibilities of each party according to the agreed terms of delivery. All other insurances shall be agreed upon separately.

7. Transfer of Ownership

Ownership of a product is transferred to the Buyer when the full selling price has been paid and is freely available to the Supplier. An acceptance is not regarded as payment. The Supplier may at any time, without advance notice and separate payment, recover the products that have not been paid in full. If the Buyer has paid a part, both parties shall make an account within 30 days and present their calculation to the opposing party.

8. Declarations

The Sender is to be responsible for the reception of notifications sent to the other party.

9. Disputes

Any disputes due to these deliveries and interpretation of these delivery terms shall be settled at the district court of the place of domicile of the Supplier.



Guaranteed excellent quality

The VILPE products create better indoor air, improve energy efficiency and prolong the lifetime of buildings. The products are manufactured by a Finnish family business VILPE which is the leading manufacturer and developer of ventilation and special roofing products in Finland, Baltics, Russia and Scandinavia.

The products are of excellent quality and are durable, which is why we offer a 20-year warranty of technical parts and 10-year colour warranty. The management system of VILPE Oy has been granted both the ISO 9001:2015 quality certificate the ISO 14001:2015 environmental certificate. These certificates cover product development, manufacturing and sales of VILPE products.

Responsibility for environment and people

We at VILPE take concrete actions to support environmentally sustainable production. The largest green energy investment in our history has been replacing oil with geothermal heat. This reduces the CO2 emissions of the factory by 330 tons annually. We also design energy efficient products. Our goal is to increase the plastics recycling possibilities during the whole lifetime of the product. Environmental sustainability is also a part of our machine investments.

Another important aspect is promoting social responsibility. Yearly, we invest 0.3 % of our turnover to support local welfare, such as, education, sports and disadvantaged children.



> [VILPE.COM](https://vilpe.com)

VILPE Oy
Kauppatie 9
FI-65610 Mustasaari FINLAND

Sales and technical support
Tel. +358 20 123 3222
sales@vilpe.com

VILPE[®]
Innovative and Easy