

Croco adjustable fastener

Easier installation with VILPE adjustable fastener



Flexible length adjustment to match the changing insulation thickness of the roof


Modern adjustable fasteners make roof installations easier as the length of the fasteners can be easily adjusted to follow the slope. VILPE Croco adjustable fasteners decrease the risk of mounting errors as the fastener can be adjusted according to the thickness of the roofing and isolation materials. As fewer fastener models are needed, mounting costs decrease.

A T-25 (7 mm) Torx tool is used for installation. If installing the product on concrete, an M drill and an M drill extension or similar tools are also needed. The Torx tool and M drill with extension are sold separately.

Croco A adjustable fasteners are used to fasten PVC roofings, while the Croco B adjustable fasteners fit bitumen roofings. Adjustable fasteners can be used for both new construction and renovation.



Dimensions

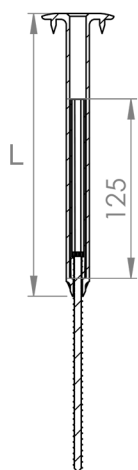

Croco A/B-Adjustable	L	Insulation	Flexibility
Croco A/B-Adjustable 150	147	165 - 250	15
Croco A/B-Adjustable 200	197	220 - 300	20
Croco A/B-Adjustable 250	247	275 - 350	25
Croco A/B-Adjustable 300	297	330 - 400	30
Croco A/B-Adjustable 350	347	380 - 450	30
Croco A/B-Adjustable 400	397	430 - 500	30
Croco A/B-Adjustable 450	447	480 - 550	30
Croco A/B-Adjustable 500	497	530 - 600	30
Croco A/B-Adjustable 550	547	580 - 650	30
Croco A/B-Adjustable 600	597	630 - 700	30
Croco A-Adjustable 650	647	680 - 750	30
Croco A-Adjustable 700	697	730 - 800	30

Material

Croco fasteners, like all VILPE® products, are manufactured from non-corrosive, weather and shockproof, chemically neutral and recyclable polypropylene plastics (PP).

Colour



Black

Reference RR 33, RAL 9017

Usage examples

Installation

